


GIANT

Sewer Cleaning and Hydroexcavating Pumps

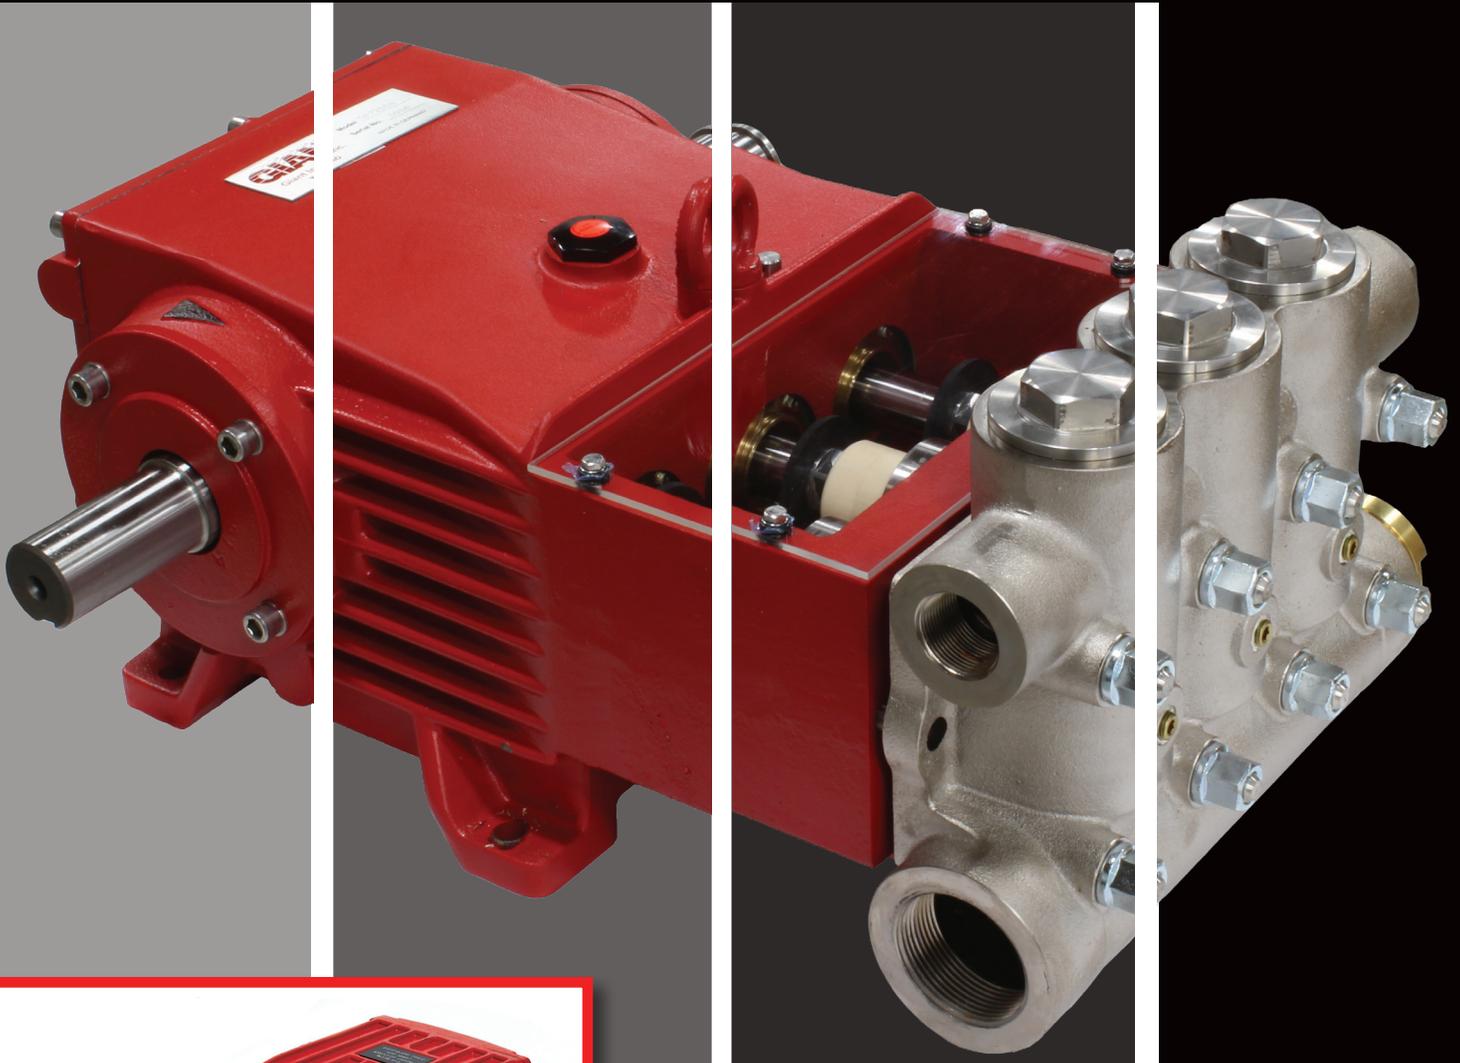

**Giant Pumps:
Built to Last**

Performance Under Pressure


P200/P300 Series

- 1000 to 4000 PSI
- 2 to 6 GPM
- 10 Hp
- Belt Drive
- Direct Drive (electric, gas, hydraulic)



P54/P58 Pumps

- 1000 to 4000 PSI
- 4 to 5 GPM
- 10 Hp
- Belt Drive
- Direct Drive (electric, gas, hydraulic)

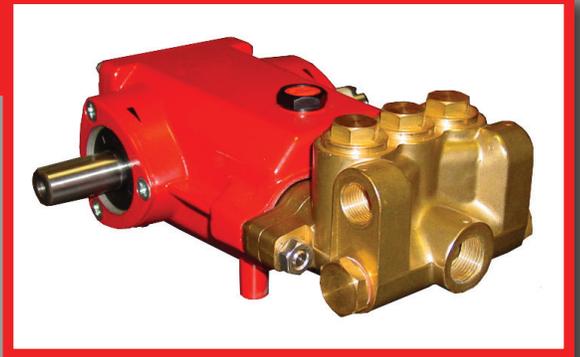

SP Series

- 2000 to 3500 PSI
- 6 to 12 GPM
- 15 Hp
- Belt Drive
- Direct Drive (hydraulic)



P400 Series

- 2000 to 4000 PSI
- 8 to 20 GPM
- 25 Hp
- Belt Drive
- Direct Drive (electric, gas, diesel, hydraulic)




MP Series

- 2000 to 4000 PSI
- 8 to 13 GPM
- 25 Hp
- Belt Drive
- Direct Drive (hydraulic)



LP Series

- 2000 to 5000 PSI
- 12 to 20 GPM
- 40 Hp
- Belt Drive
- Direct Drive (hydraulic)

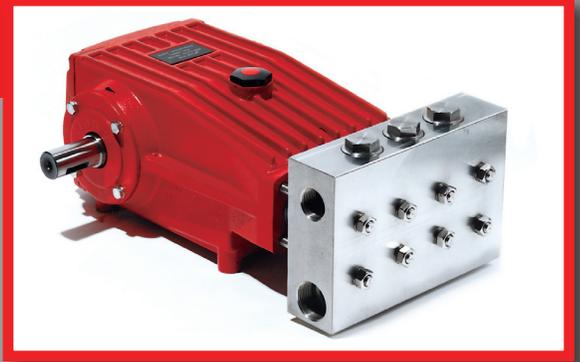

GP5100 Series

- 2000 to 4000 PSI
- 25 to 40 GPM
- 50 Hp
- Belt Drive
- Direct Drive (hydraulic)




GP7100 Series

- 2000 to 3000 PSI
- 40 to 65 GPM
- 75 Hp
- Belt Drive
- Direct Drive (hydraulic)
- Available with gearbox



GP7600 Series

- 2000 to 3000 PSI
- 50 to 85 GPM
- 100 Hp
- Belt Drive
- Direct Drive (hydraulic)
- Available with gearbox

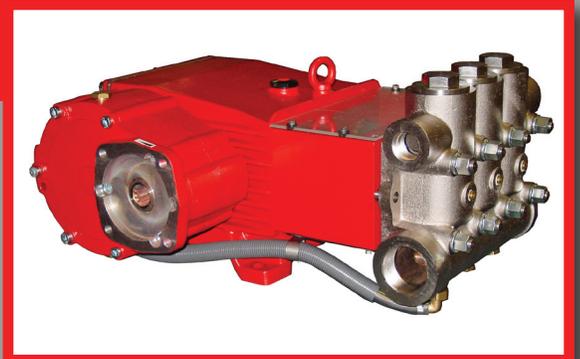

GP8000/GP8100 Series

- 2000 to 3000 PSI
- 75 to 120 GPM
- 150 Hp
- Belt Drive
- Direct Drive (hydraulic)
- Available with gearbox



Built to last for the Sewer Cleaning and Hydroexcavating Market!

Machined to Perfection




Your growth depends on providing a quality product with the engineering to withstand the harshest conditions. With a German/American background, Giant's industrial line of pumps not only meets your needs, but they provide solutions that help your company grow.

What's Unique About Giant's Gear Ends?

The gear end of Giant's sewer cleaning pumps have been built to last for thousands of hours of operation. Giant continues to service pumps that have been in the field for over twenty years. Expensive materials are standard, such as spheroidal cast iron crankcase gear ends. Critical components such as crankshafts are forged, ground, tumbled and hardened. Tapered roller bearings evenly distribute the forces throughout the gear end. Tough bronze connecting rods, not inexpensive aluminum, lead to crossheads which guide the machined and hardened stainless steel plunger bases to provide a smooth operation and less wear on fluid end components.

Why Giant's Fluid End Lasts so Long?

It's important that you're not always changing fluid end components in the field. Giant's fluid end is designed with the right material to meet your needs. Materials such as Nickel-Aluminum-Bronze, 303 and 316 stainless steel, duplex steel, and Titanium give you the flexibility to withstand the harshest fluid media. With larger surface areas and expertly machined fluid ends, Giant's pumps are not only quieter, but run with greater efficiency and less chance of cavitation. Finally, seal components from NBR to Viton, Teflon or Kalrez allow your pump to be rewarding for you. You will know you've made the right choice with a Giant Pump.

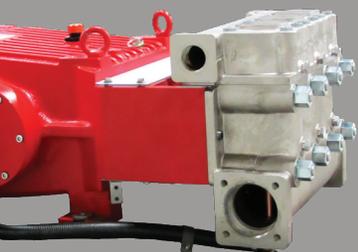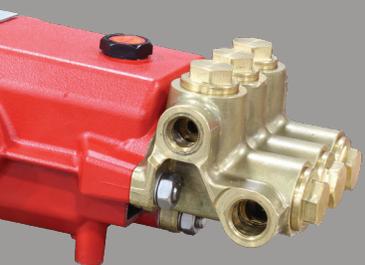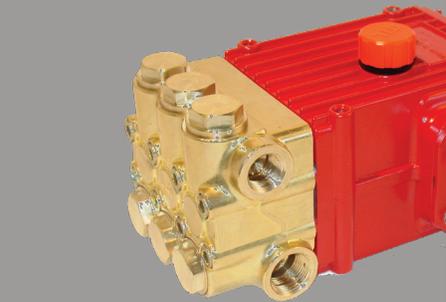

GIANT

Performance Under Pressure

Giant Industries
900 N. Westwood Ave
Toledo, OH 43607
419-531-4600
419-531-6836
www.giantpumps.com