


# Sewer Cleaning Turbo Nozzles



- Removes blockages with one operation
- Front nozzles blast out contaminants such as: sand, gravel, concret and gypsum
- Back nozzles ensure contaminants are flushed out

Clean pipes **faster** with a rotating 0° nozzle as it moves along a pipe

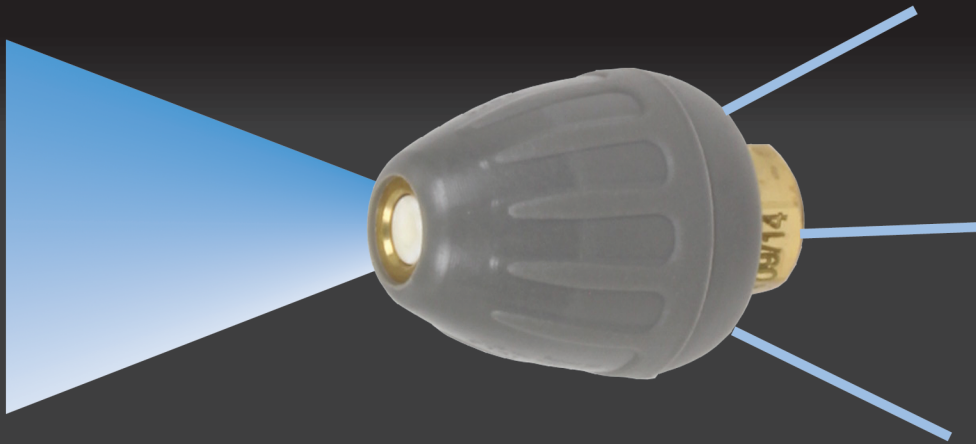

# Sewer Cleaning Turbo Nozzles



Sewer Cleaning Turbo Nozzle - 50 Inlet 1" NPT		
	U.S.	Metric
Pressure Maximum	4350 PSI	300 bar
Temperature Maximum	195 °F	90 °C
Flow Rate From	47.6 GPM	180 l/min
From Hose Diameter	3.9 in	100 mm
Spray Angle	24°	24°
Length	3.7 in	95 mm
Diameter	ø2.2 in	ø55 mm
Weight	28.2 oz	0,8 kg

Sewer Cleaning Turbo Nozzle - 40 Inlet 1/2" NPT		
	U.S.	Metric
Pressure Maximum	4350 PSI	300 bar
Temperature Maximum	195 °F	90 °C
Flow Rate From	10.6 GPM	40 l/min
From Hose Diameter	2.4 in	60 mm
Spray Angle	24°	24°
Length	2.5 in	64 mm
Diameter	ø1.6 in	ø40 mm
Weight	10.6 oz	0,3 kg



Sewer Cleaning Turbo Nozzle - 35 Inlet 1/8" BSP		
	U.S.	Metric
Pressure Maximum	2175 PSI	150 bar
Temperature Maximum	195 °F	90 °C
Flow Rate Maximum	7.9 GPM	30 l/min
Spray Angle	20°	20°
Diameter	ø1.4 in	ø35 mm

Sewer Cleaning Turbo Nozzle - 30 Inlet 1/8" BSP		
	U.S.	Metric
Pressure Maximum	2175 PSI	150 bar
Temperature Maximum	195 °F	90 °C
Flow Rate Maximum	7.9 GPM	30 l/min
Spray Angle	20°	20°
Diameter	ø1.2 in	ø30 mm



Sewer Cleaning Turbo Nozzle - 25 Inlet 1/8" BSP		
	U.S.	Metric
Pressure Maximum	2175 PSI	150 bar
Temperature Maximum	195 °F	90 °C
Flow Rate Maximum	7.9 GPM	30 l/min
Spray Angle	20°	20°
Diameter	ø0.98 in	ø25 mm