


Model 21780A-S

Double Tube Lance, Bent

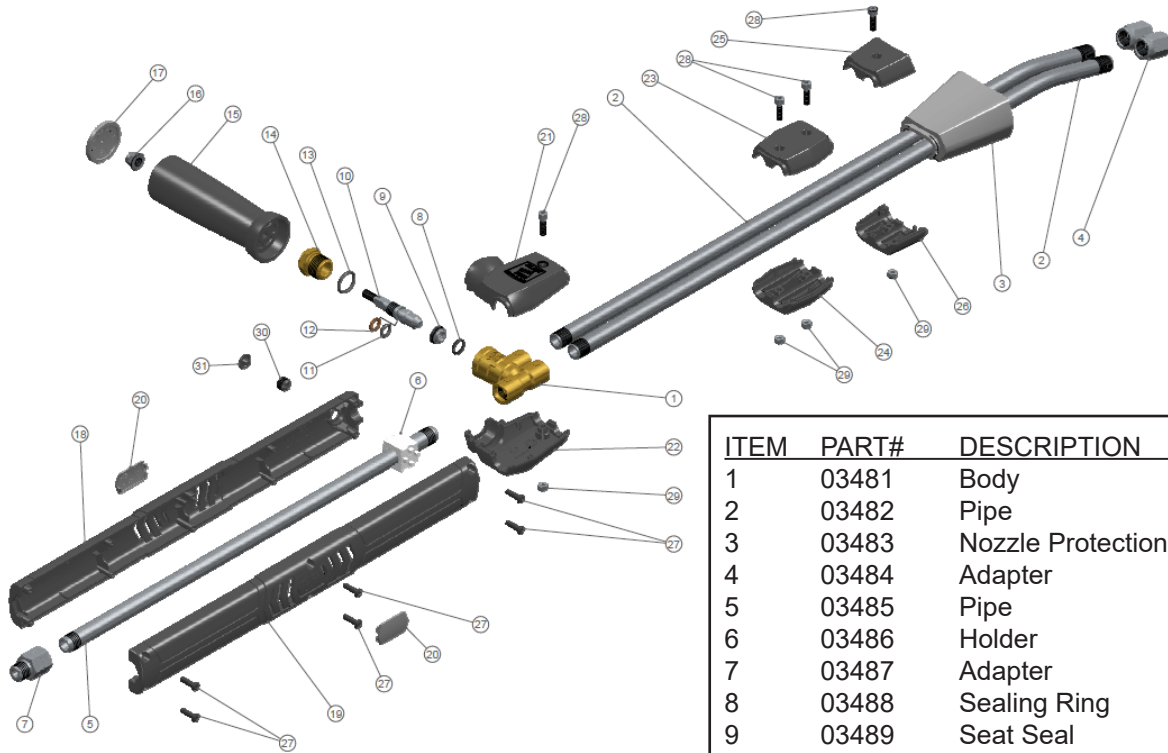

OPERATING CONDITIONS

Maximum Flow: 12 GPM (45 L/min)
Maximum Pressure: 3600 PSI (250 bar)
Maximum Temperature: 320 °F (160 °C)
Inlet Port: 1/4" MNPT
Discharge Ports: (2) 1/4" FNPT
Weight: 2.8 lbs. (1.3 kg)
Length: 42" (1029 mm)
Material (Tubes): Stainless Steel

ITEM	PART#	DESCRIPTION	QTY
1	03481	Body	1
2	03482	Pipe	2
3	03483	Nozzle Protection	1
4	03484	Adapter	2
5	03485	Pipe	1
6	03486	Holder	1
7	03487	Adapter	1
8	03488	Sealing Ring	1
9	03489	Seat Seal	1
10	03490	Shutter	1
11	03491	Sealing Ring	1
12	03492	Back-Up Ring	1
13	03493	Sealing Ring	1
14	03494	Shutter Guide	1
15	03495	Handle	1
16	03496	Nut	1
17	03497	Plug	1
18	03498	Left Shell	1
19	03499	Right Shell	1
20	03500	Insert	2
21	03501	Right Shell	1
22	03502	Left Shell	1
23	03503	Right Shell	1
24	03504	Left Shell	1
25	03505	Right Shell	1
26	03506	Left Shell	1
27	03507	Screw	6
28	03508	Screw	4
29	03509	Nut	4
30	03510	Grub Screw	1
31	03511	Plug	1

GIANT

Performance Under Pressure

Giant Industries, Inc.
900 N. Westwood Ave.
Toledo, Ohio 43607
PHONE 419-531-4600
FAX 419-531-6836
www.giantpumps.com



WARNING: This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.
For more information go to www.P65Warnings.ca.gov