


**INTRODUCING**

# GP7622

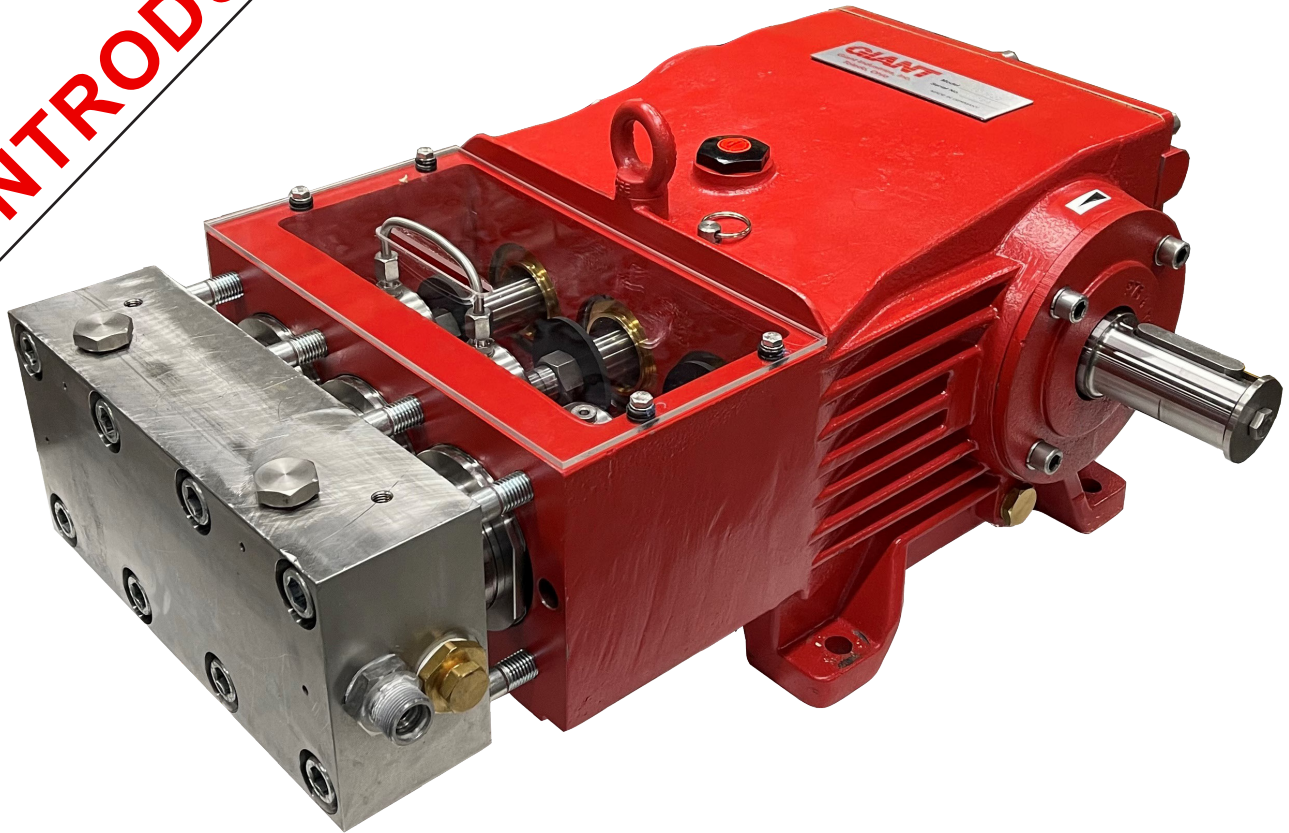

## Applications

- Heat Exchanger Cleaning
- Condensor Cleaning
- Pipeline Cleaning
- Surface Preparation
- Water Jetting
- Steel Mill Processing
- Hydrostatic Testing
- Etc.

## Specifications

	<b>U.S.</b>	<b>Metric</b>
Volume.....	12.7 GPM.....	48 L/min
Pressure .....	15,000 PSI.....	1000 bar
Speed .....	.....	800 RPM
Power .....	126.4 HP.....	94.3 kW
Temperature .....	104 °F.....	40 °C
Plunger Size .....	0.87".....	22 mm
Plunger Stroke.....	2.28".....	58 mm
Weight .....	379 lbs.....	172 kg

# GIANT

**Performance Under Pressure**

## **GIANT INDUSTRIES, INC.**

900 N. Westwood Ave.

Toledo, Ohio 43607

(419) 531-4600

FAX (419) 531-6836

[www.giantpumps.com](http://www.giantpumps.com)

© Copyright 2022 Giant Industries, Inc.

## Construction

- Crankcase: Aluminum
- Crankshaft: Drop forged, hardened, ground and polished
- Bearings: Tapered Roller
- Connecting Rods: Bronze
- Plungers: Hard Metal Coating
- Seals: Nitrile with fabric reinforcing with weep return system
- Valves: High Grade Stainless Steel
- Manifold: Stainless Steel

## Dimensions - Inches (mm)

