
Giant Pump Assembly



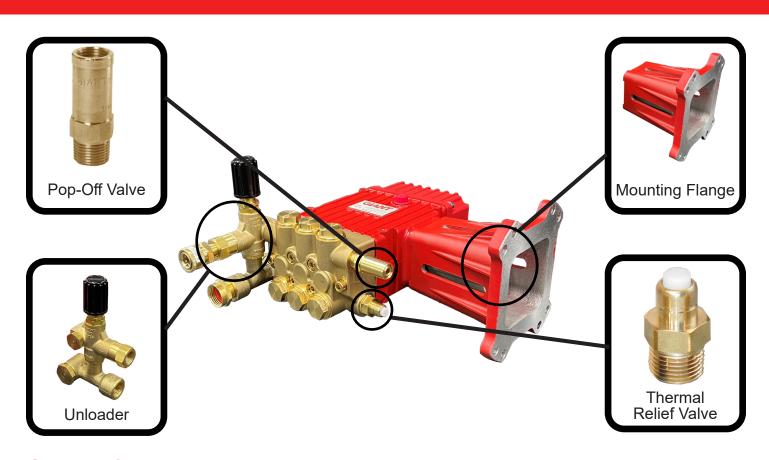

Specifications

• Flow: 4 GPM

Pressure: 4000 PSI

Speed: 3450 RPM

Assembly Includes:

- Unloader with QD Fitting
- Thermal Relief Valve
- Pop-Off Valve
- Garden Hose Fitting & Screen
- Custom Units Available



Pressure Washing Accessories

Shut-Off Gun

p/n 21290C

Flow: 10 GPM

Pressure: 5000 PSI



Foot Valve

p/n 21515

Flow: 10 GPM

Pressure: 5000 PSI



Unloader

Pressure Actuated

p/n 23290H

6.6 GPM @ 4000 PSI



Unloader

Flow Actuated

p/n 22654A up to 6.5 GPM up to 4000 PSI



Stainless Steel Lances

With or without insulated grips* 1/4", 3/8" and 1/2" available

From 24"-96"

*1/4 only

Chemical Injectors

Fixed or Adjustable Injectors Stainless Steel Internal Parts Orifice Sizes: 1.8, 2.1, 2.3 mm





Valves

Surface Cleaner Valve

p/n 21700LA



Relief Valves

1200-6000 PSI

Can be factory preset to your PSI.

