

Drive Unit Pneumatic 5/3500

Z65-2e

Technical Data

	U.S.	Metric
Max. Working Pressure	50,750 PSI	3500bar
Max. Flow Rate	13.2 GPM	50 L/min
Connection Inlet		M 26 x 1.5 female
Connection Shaft Side		M 14 x 1.5 LH female
Important	No traverse loads permitted	
Width x Length	4.0" x 8.8"	102 mm x 223 mm
Weight (approx.)	5.5 lbs.	2.5 kg
Pneumatic Drive / Air motor		
Speed		0-1800 RPM
Air requirement	0.18 ft ³ /s	5.0 L/s
Air working pressure	91 PSI	6.3 bar
Power	0.16 HP	120W




Part No. 7029561

Note

Usable nozzle heads: see page P35-1E with HP-Pipe nipple M 14x1.5 LH male (p/n 7014047)
See Rotating nozzle PRD 3500 AIR: Page Z30-1e

	U.S.	Metric
Max. Working Pressure	50,750 PSI	3500bar
Max. Flow Rate	13.2 GPM	50 L/min
Connection Inlet		M 26 x 1.5 female
Connection Outlet 4x M 26x1.5 IG		Nozzle carrier ø 80 mm
Important	No traverse loads permitted	
Width x Length	4.8" x 13.0"	121 mm x 331 mm
Weight (approx.)	11.7 lbs.	5.3 kg
Pneumatic Drive / Air motor		
Speed		0-1800 RPM
Air requirement	0.28 ft ³ /s	8.0 L/s
Air working pressure	91 PSI	6.3 bar
Power	0.40 HP	300W

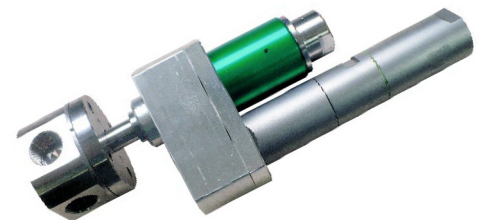

Part No. 7028990

Giant Industries, Inc.
900 N. Westwood Ave.
Toledo, OH 43607
(419) 531-4600
(419) 531-6836
www.giantpumps.com



WARNING: This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.
For more information go to www.P65Warnings.ca.gov