


STRAIGHT JET INSERT NOZZLES FORM A + B

Z 41-1e

17.08.2022

Seite/Page 1/1

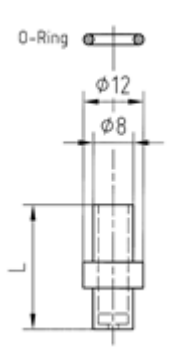

For use with spraying equipment and water tools up to an operating pressure of 1500 bar

Technical Data

- Working pressure: max. 1500 bar
- Material: stainless steel 1.4034, hardened
- Sealing by means of O-Ring
- Nozzle factor 0,95

Type	Nozzle Ø [mm]	L [mm]	Operating pressure [bar]	Part No.
A	0.50	12	1500	7001176
	0.60			7001177
	0.70			7001178
	0.80			7001179
	0.90			7003528
	1.00			7003529
	1.20			7003531
B	0.50	24		7014421
	0,60			xxx
	0,70			7014422
	0,80			7012688
	0,85			7014110
	0.90			7001180
	1.00			7001181
	1.10			7001182
	1.20			7001183
	1.30			7001184
	1.40			7001185
	1.50			7001186
	1.60			7001187
	1.70			7001188
	1.80			7001189
	1.90			7001190
	2.00			7001191
	2.10			7001192
	2.20			7001193
	2.30			7001194
O-Ring				1060382

KAMAT GmbH & Co. KG

Salinger Feld 10, 58454 Witten, Germany,
Fon +49 (0) 23 02 / 89 03 - 0, Fax +49 (0) 23 02 / 80 19 17, info@KAMAT.de, www.KAMAT.de
Technische Änderungen vorbehalten / Technical data subject to change without notice

