


Model 21485

Turbo Nozzle Swivel

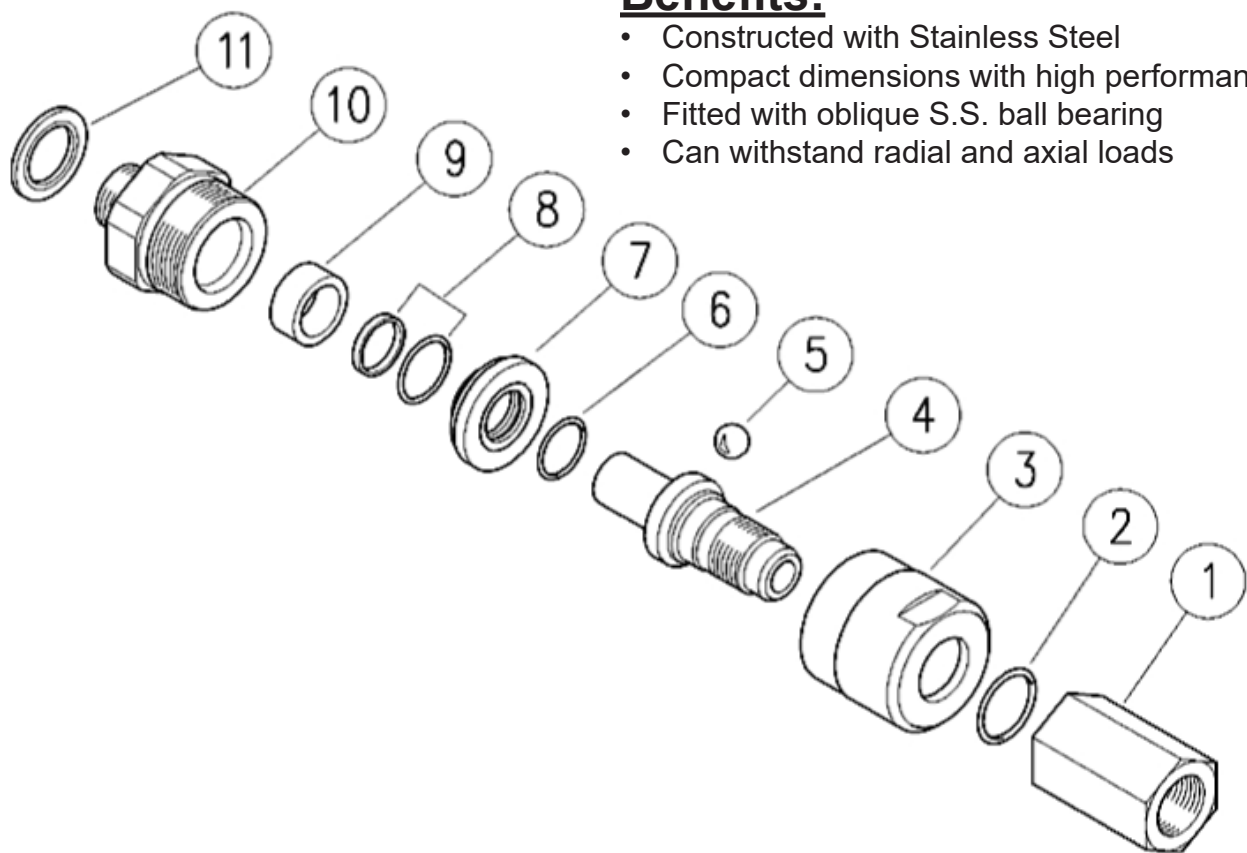

Benefits:


- Constructed with Stainless Steel
- Compact dimensions with high performance
- Fitted with oblique S.S. ball bearing
- Can withstand radial and axial loads

OPERATING SPECIFICATIONS

	<u>U.S.</u>	<u>Metric</u>
Rated Press.:	8700 PSI	600 bar
Permissible Press.:	9500 PSI	660 bar
Rated Press.:	15.8 GPM	60 L/min
Max. Working Temp. (Continuous Use):	194 °F	90 °C
Max. Working Temp. (Continuous Use):	212 °F	100 °C
Max RPM:	30 RPM	30 RPM
Torque (at 8700 PSI):	7 lbs./in.	0.8 Nm
Weight:	14.1 ozs.	400 g
Inlet Port:		3/8" FBSP
Outlet Port:		3/8" MBSP
Material:	Stainless Steel Pin and Body	

<u>Item#</u>	<u>Part#</u>	<u>Description</u>	<u>Qty.</u>
1	04383	Discharge Fitting	1
2	08706	O-ring	1
3	04384	Ring Nut	1
4	04385	Pin	1
5	04386	Ball	20
6	04332	O-ring	1
7	04387	Spacer Ring, S.S.	1
8	04388	Stem Seal and O-ring	1
9	04389	Bushing	1
10	04390	Inlet Fitting	1
11	04391	Sealing Washer	1

Dimensions- mm (inches)

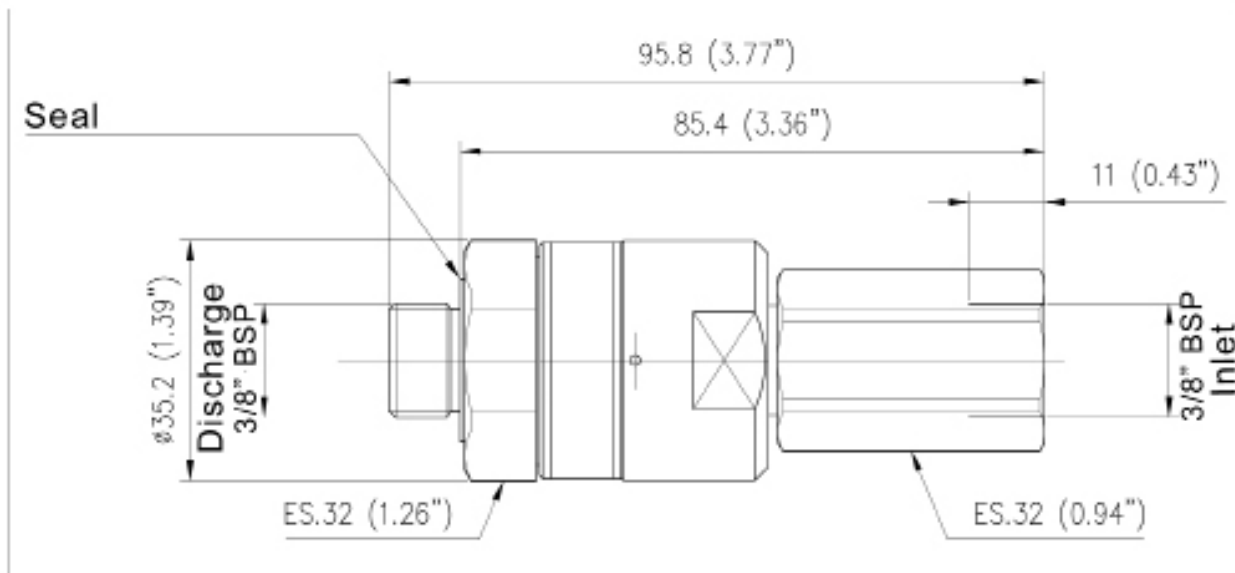

WARNING: This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov

GIANT

Performance Under Pressure

Giant Industries, Inc.
900 N. Westwood Ave.
Toledo, Ohio 43607
419-531-4600

www.giantpumps.com

© Copyright 2015 Giant Industries, Inc.

03/15 21485.indd