


Series 23290(H)/23295(H)

Pressure Actuated
Unloader/Regulator
with bypass connection

Specifications

Max Flow: 6.6 GPM..... 25 L/min
 Pressure (23290): 0-4000 PSI..... 0-275 Bar
 Pressure (23295): 0-2000 PSI..... 0-140 Bar
 Maximum Temp.: 194 °F 90 °C
 Weight: 2.0 lbs. 0.91 Kg
 Inlet Port: 3/8" FNPT
 Discharge Port (w/ injector): 3/8" MNPT
 Discharge Port (w/o injector): 3/8" FNPT
 Bypass: 3/8" FNPT

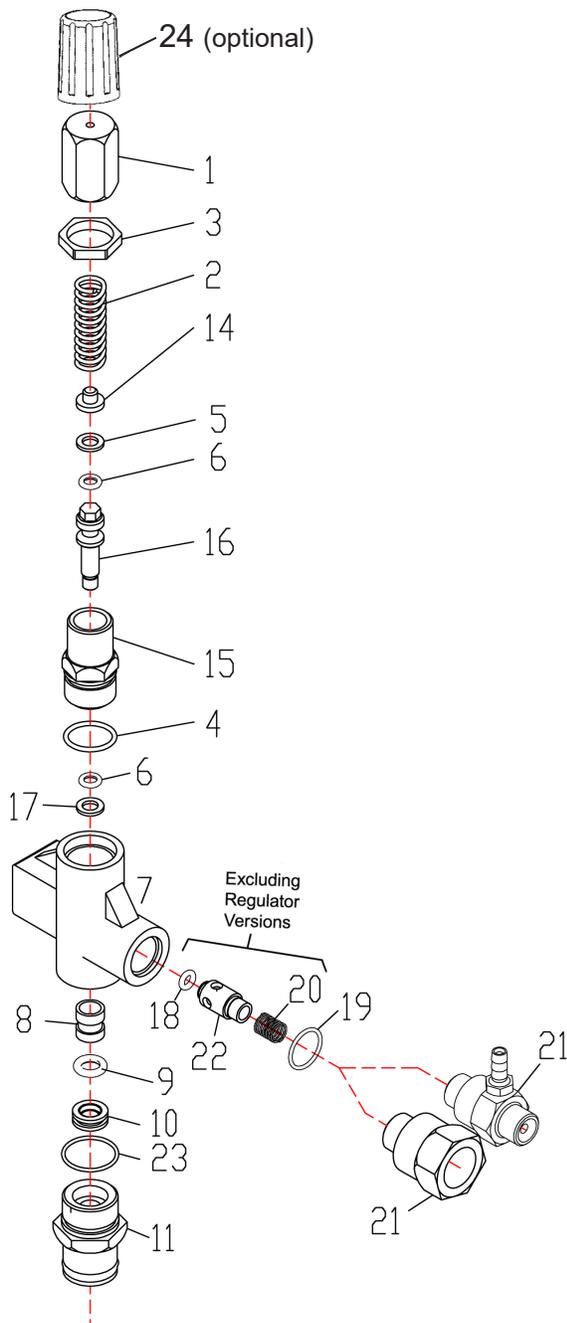

Item #	Part#	Description	Qty.
1	05137	Adjusting Spring Cap	1
2	08550	Pressure Spring (23290)	1
2	04464	Pressure Spring (23295)	1
3	05134	Nut	1
4	07770**	O-Ring	1
5	08553**	Support Ring	1
6	07915**	O-Ring, Piston	2
7	05143	Unloader Body	1
8	08691*	Piston	1
9	22659**	O-Ring	1
10	08563*	Seat	1
11	05217	Bypass Fitting	1
14	08549	Spring Retainer	1
15	08558	Guide Plug	1
16	08555	Piston Rod	1
17	08559**	Support Ring	1
18	12326**	O-Ring (except regulator versions)	1
19	07913**	O-Ring	1
20	12328	Kick Back Valve Spring (except regulator versions)	1
21	12340	Kick back Valve Retainer	1
21	23750-X.X	Siphon Injector	1
22	12325	Kick Back Valve Cone (except regulator versions)	1
23	08564**	O-Ring	1
24	08552	Handwheel (optional)	1
	*09321	Full Repair Kit (4-6, 8-10, 17-19 & 23)	
	+09322	Seal Repair Kit (4-6, 9, 17-19 & 23)	

ORDERING INFORMATION

Models

23290/23295:
23290R/23295R:
23290/23295-1.8
23290R/23295R-1.8
23290/23295-2.1
23290R/23295R-2.1
23290/23295-2.3
23290R/23295R-2.3
23290/23295-1.8A
23290R/23295R-1.8A
23290/23295-2.1A
23290R/23295R-2.1A
23290/23295-2.3A
23290R/23295R-2.3A

Description

Unloader with no injector
Regulator with no injector
Unloader with 1.8mm fixed chemical injector
Regulator with 1.8mm fixed chemical injector
Unloader with 2.1mm fixed chemical injector
Regulator with 2.1mm fixed chemical injector
Unloader with 2.3mm fixed chemical injector
Regulator with 2.3mm fixed chemical injector
Unloader with 1.8mm adjustable chemical injector
Regulator with 1.8mm adjustable chemical injector
Unloader with 2.1mm adjustable chemical injector
Regulator with 2.1mm adjustable chemical injector
Unloader with 2.3mm fixed chemical injector
Regulator with 2.3mm fixed chemical injector

Installation and Operation Instructions

- 1) The valve should be tension-free; therefore, loosen handwheel (3) as far as possible.
- 2) While the gun is open, turn the handwheel (3) in a clockwise motion until desired pressure is reached.

Important! If the nozzle orifice is too small to allow all the fluid to run through the hole after the required operating pressure is reacted, on no account is the valve to be adjusted higher than the maximum operating pressure of the pump.

Disassembly and Reassembly of the 23290(R)/23295(R) Unloader/(Regulator)

1. Remove Adjusting Spring Cap (1) and remove Pressure Spring (2) and Spring Retainer (14).
2. Pull Inlet Tube (12) off Bypass Fitting (11) and unscrew Bypass Fitting from Unloader Body (7).
3. Insert a small screwdriver or allen wrench in the bottom of the Bypass Fitting (11) and push the Seat (9) out of the Bypass Fitting. NOTE: Use caution to prevent scratching or nicking the chamfered area of the Seat.
4. Insert a 3/16" allen wrench into the top of the Piston Rod (16) and a 1/2" deep-well socket on to the Piston (8). Remove the Piston from the Piston Rod.
5. Unscrew the Guide Plug (15) from the top of the Unloader Body (7). Push the Piston Rod (16) out of the Guide Plug.
6. Loosen the Kick Back Valve Retainer (21) or Siphon Injector (21) and remove the Kick Back Valve Cone (22) and Kick Back Valve Spring (20).
7. Inspect all o-rings and mating parts. Replace with parts from the kit.
8. Reassemble in reverse order.

Note: Lightly grease all parts before reinstalling.



WARNING: This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.
For more information go to www.P65Warnings.ca.gov

Giant Industries, Inc.

900 N. Westwood Ave., Toledo, Ohio 43607
PHONE: 419-531-4600 FAX: 419-531-6836
www.giantpumps.com
© Copyright 2015 Giant Industries, Inc.

GIANT
Performance Under Pressure