


Model 22185P-M08

Rebuildable Plastic Pulsation Dampener

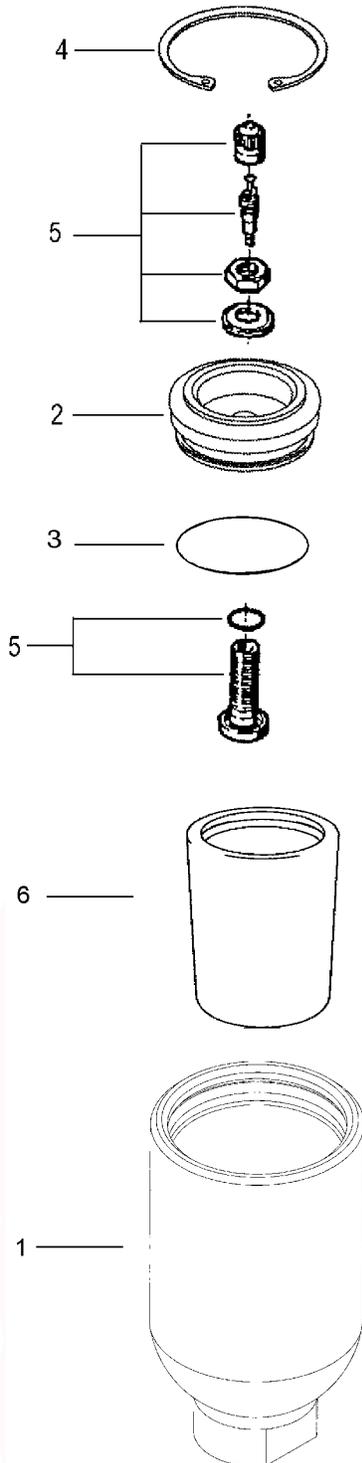

ITEM	PART #	DESCRIPTION	QTY
1	22186P-M08	Body, Plastic, Black	1
2	22052BP	Top, Plastic, Black	1
3	05640	O-Ring	1
4	22054A	Snap Ring	1
5	22036	Valve Assembly	1
6	22026	Bladder	1

NOTE: Precharge pressure is always one half of operating pressure.

Operating Conditions

	U.S.	Metric
Max. Flow:	6 GPM	22.7 l/min
Max. Pressure:	500 PSI	35 bar
Max. Temperature:	200 °F	93 °C
Connection:		1/2" NPT
Max. Precharge:	250 PSI	17.5 bar
Capacity:	4.2 in ³	68.8 mm ³
Burst Strength:	1500 PSI	100 bar



WARNING: This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov

GIANT

Performance Under Pressure

Giant Industries, Inc.

900 N. Westwood Ave., Toledo, Ohio 43607

419-531-4600 Fax: 419-531-6836

www.giantpumps.com