


Model 21460

Shut-Off Gun

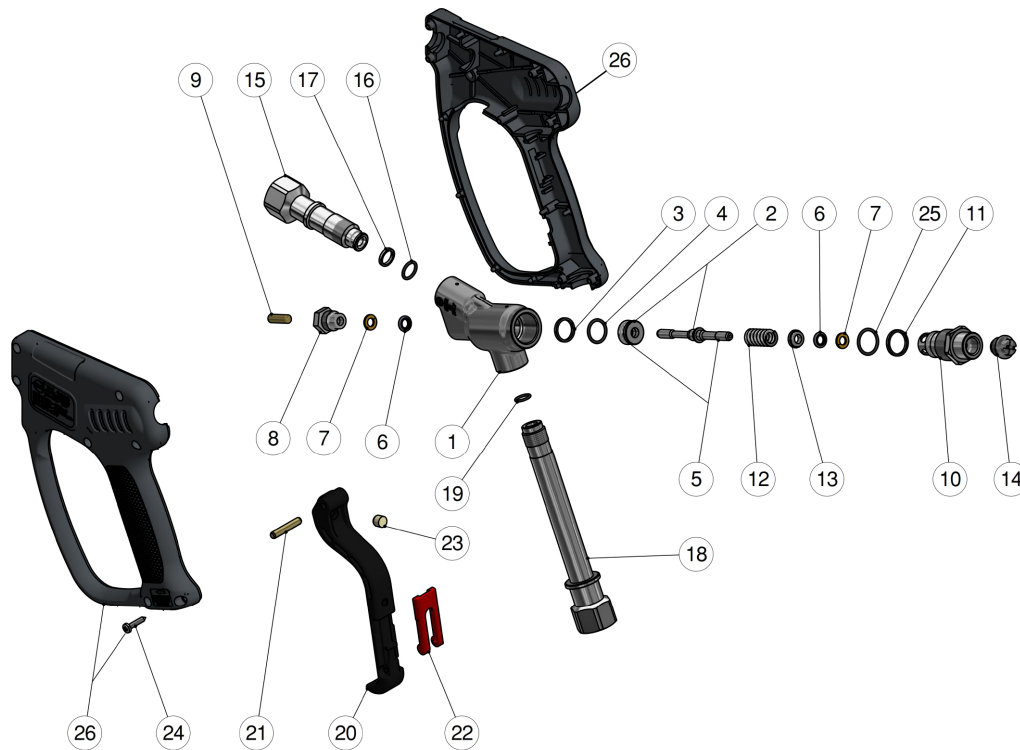


ITEM	PART	DESCRIPTION	QTY.
1	03232	Housing	1
2/5*	03226	Piston/Seat Assembly	1
3*	03229	Back-Up Ring	1
4*	03228	O-Ring	1
6*	03123	Stem Seal	2
7*	03233	Back-Up Ring	2
8	03133	Guide Sleeve	1
9	03134	Control Bolt	1
10	03222	Plug	1
11*	03223	Back-Up Ring	1
12*	03125	Spring	1
13*	03124	Spacer Ring	1
14	04038	Plug	1
15	03236-NPT	Discharge Fitting, 3/8" NPT	1
16*	03234	O-Ring	1
17*	03235	Back-Up Ring	1
18	03230-NPT	Inlet Fitting, 3/8" NPT	1
19*	03231	O-Ring	1
20	03136	Trigger	1
21	05990	Parallel Pin	1
22	04048	Safety Latch	1
23	03227	Cam	1
24	04052	Self-Tapping Screw	7
25*	03224	O-Ring	1
26/27	03237	Housing, Left & Right	1

* 09833 Repair Kit


Operating Specifications:

	U.S.	Metric
Maximum Flow:	10.5 GPM	(40 l/min)
Rated Pressure:	15,000 PSI	(1000 Bar)
Permissible Pressure:	16,000 PSI	(1100 Bar)
Maximum Temperature:	212 °F	(100 °C)
Inlet:	3/8" FNPT	
Discharge:	3/8" FNPT	

Attention! In order to prevent any risk of **INSTABILITY** of the gun due to pressure spikes, **CHECK** the enclosed **CHART** (below). the use of safety devices (**Shoulder Rest**) in function of the pressure/flow Rate parameters.

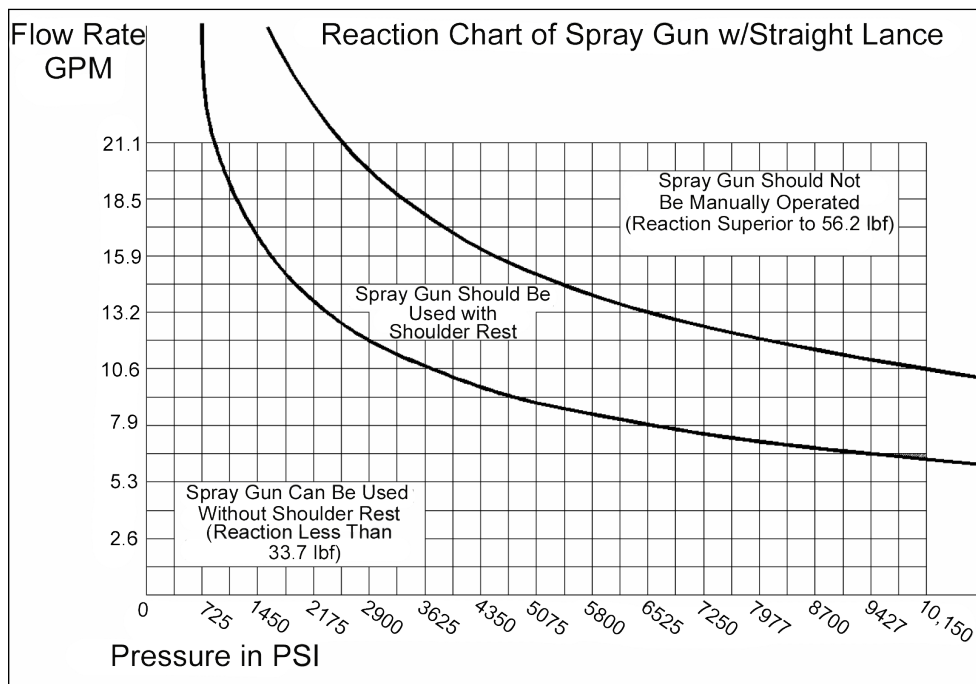

Dimensions-mm(Inches)

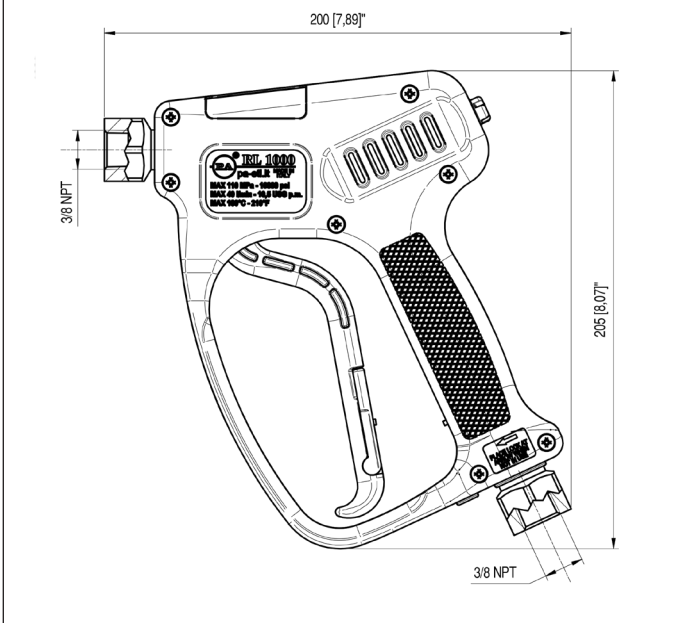

WARNING: This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.
For more information go to www.P65Warnings.ca.gov

GIANT
Performance Under Pressure

Giant Industries, Inc.
900 N. Westwood Ave.
Toledo, Ohio 43607
419-531-4600
FAX 419-531-6836
www.giantpumps.com
© Copyright 2020 Giant Industries, Inc.