

INTRODUCING

High Volume Flow Switch




- Magnetic drive obtained by the plunging piston movement
- Electrical insulation: class **IP55**
- Magnetic probe casing made of ant flame material

OPERATING SPECIFICATIONS

	<u>U.S.</u>	<u>Metric</u>
Flow:	26.4 GPM	100 L/min
Pressure:	4500 PSI	310 Bar
Temperature:	165 °F	75 °C
Inlet Connection:		3/4" FNPT
Outlet Connection:		3/4" FNPT
Rated Voltage:	12 & 230 V AC/DC	
Cable Length:	49.2"	1250 mm
Maximum Current:	3A	
Maximum Power:	60 Va	
Electric Wired	2 x 0.50 mm ²	
Type of Action:	1 C	

Dimensions mm (in)

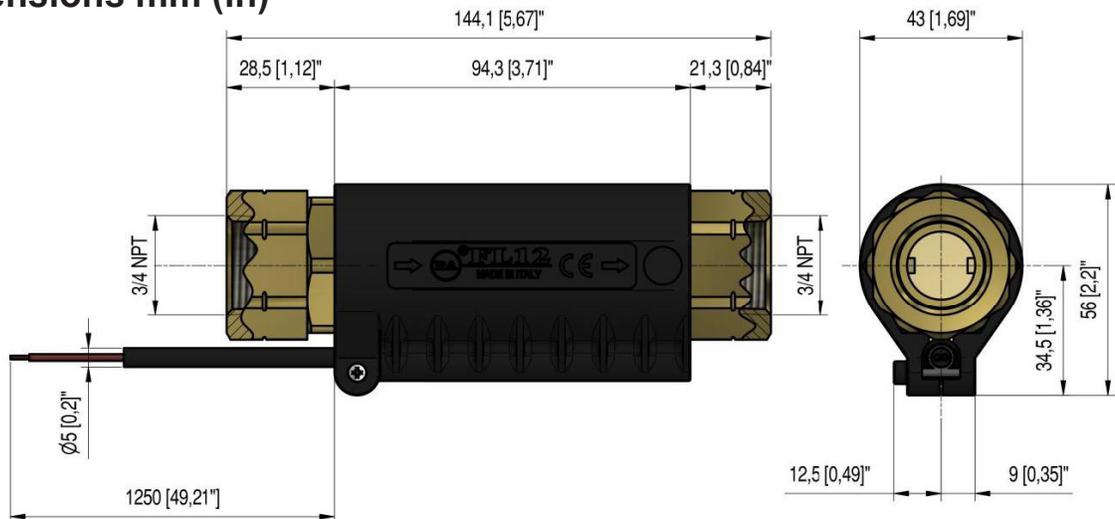

GIANT

Performance Under Pressure

Giant Industries, Inc. 900 N. Westwood Ave. Toledo, OH 43607

419-531-4600 Fax: 419-531-6836 www.giantpumps.com

© 2019 Giant Industries, Inc.



WARNING: This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov