

Model 22145C


Inlet Filter w/Bypass

OPERATING CONDITIONS

	<u>U.S.</u>	<u>Metric</u>
Max. Flow*:	8 GPM.....	30 L/min
Max. Pressure:	145 PSI.....	10 Bar
Max. Temperature:	105 °F.....	40 °C
Strainer Size:	300 µm.....	(50 mesh)
Inlet Port:	1/2" FBSP	
Outlet Port:	1/2" MBSP	
Bypass Port:	1/4" BSP	
Weight:	6.5 oz.....	184 g


*Pressure Drop = 3.6 PSI (0.25 Bar)

(See chart below)

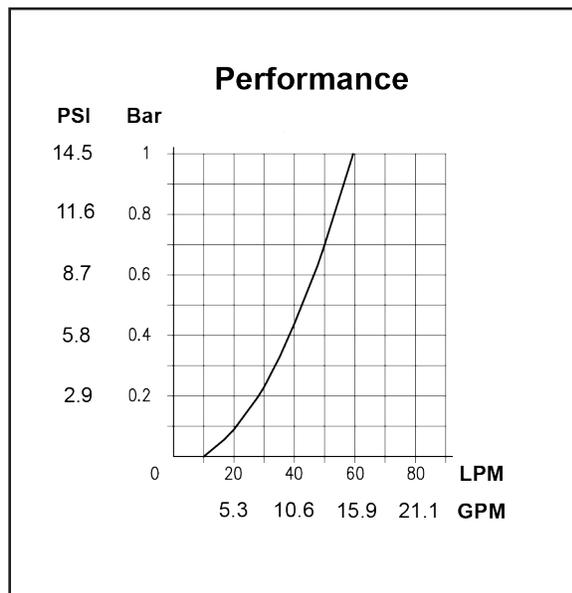

PARTS LIST

<u>Item</u>	<u>Part #</u>	<u>Description</u>	<u>Qty.</u>
1	03217	Strainer Plug	1
2	03218	Screen, 50 Mesh	1
3	03219	O-Ring	1
4	03220	Housing	1
5	03221	Plug, 1/4" BSP	1

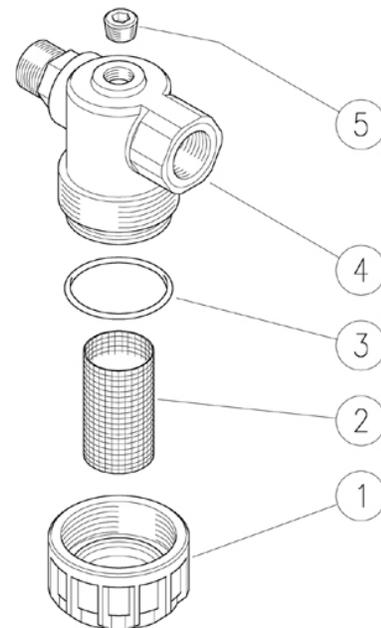

WARNING: This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov