


Model 22185P

Rebuildable Plastic Pulsation Dampener

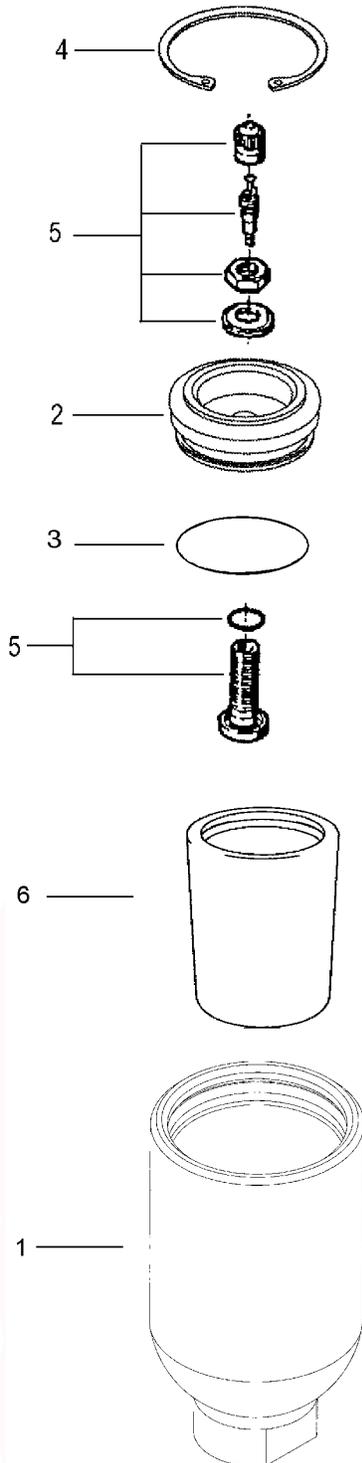

ITEM	PART #	DESCRIPTION	QTY
1	22186BP	Body, Plastic, Black	1
2	22052BP-CLOSED	Top, Plastic, Black	1
3	05640	O-Ring	1
4	22054A	Snap Ring	1
5	22036	Valve Assembly	1
6	22026	Bladder	1

NOTE: Precharge pressure is always one half of operating pressure.

Operating Conditions

	U.S.....	Metric
Max. Flow:	6 GPM.....	22.7 l/min
Max. Pressure:	500 PSI.....	35 bar
Max. Temperature:	200 °F.....	93 °C
Connection:	3/8" BSP
Max. Precharge:	250 PSI.....	17.5 bar
Capacity:	4.2 in ³	68.8 mm ³
Burst Strength:	1500 PSI.....	100 bar



WARNING: This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.

For more information go to www.P65Warnings.ca.gov

GIANT

Performance Under Pressure

Giant Industries, Inc.

900 N. Westwood Ave., Toledo, Ohio 43607

419-531-4600 Fax: 419-531-6836

www.giantpumps.com