


# Series 21910-XX

# Long Range Shut-Off Gun Assembly

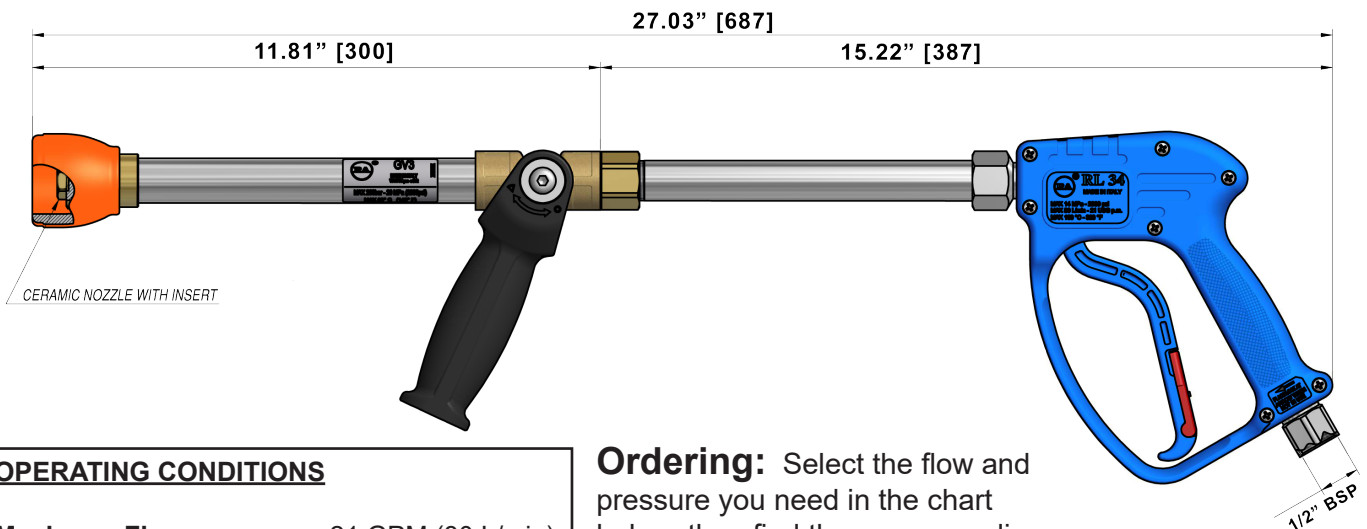


## OPERATING CONDITIONS

|                              |                    |
|------------------------------|--------------------|
| <b>Maximum Flow:</b>         | 21 GPM (80 L/min)  |
| <b>Rated Pressure:</b>       | 2600 PSI (180 Bar) |
| <b>Permissible Pressure:</b> | 2900 PSI (200 Bar) |
| <b>Maximum Temp.:</b>        | 140 °F (60 °C)     |
| <b>Inlet Port:</b>           | 1/2" BSP           |
| <b>Weight:</b>               | 3.8 lbs. (1.7 kg)  |

**Ordering:** Select the flow and pressure you need in the chart below, then find the corresponding nozzle. For example, a 15.9 GPM (60 L/min) @ 1160 PSI (80 bar) would require a #3.5 nozzle with insert. Therefore, the assembly number would be 21910-35.

## NOZZLE SELECTION CHART

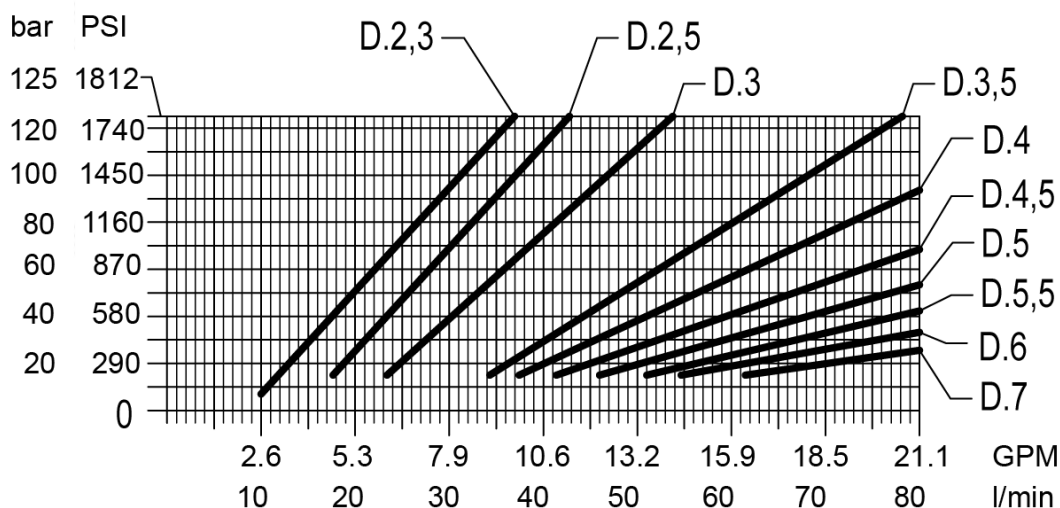

**GIANT**

Performance Under Pressure  
900 N. Westwood Ave.  
Toledo, OH 43607  
419-531-4600  
419-531-6836 (f)  
www.giantpumps.com  
©2024 Giant Industries, Inc.



**WARNING:** This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.  
For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)