


Models

27520-27525

Gun

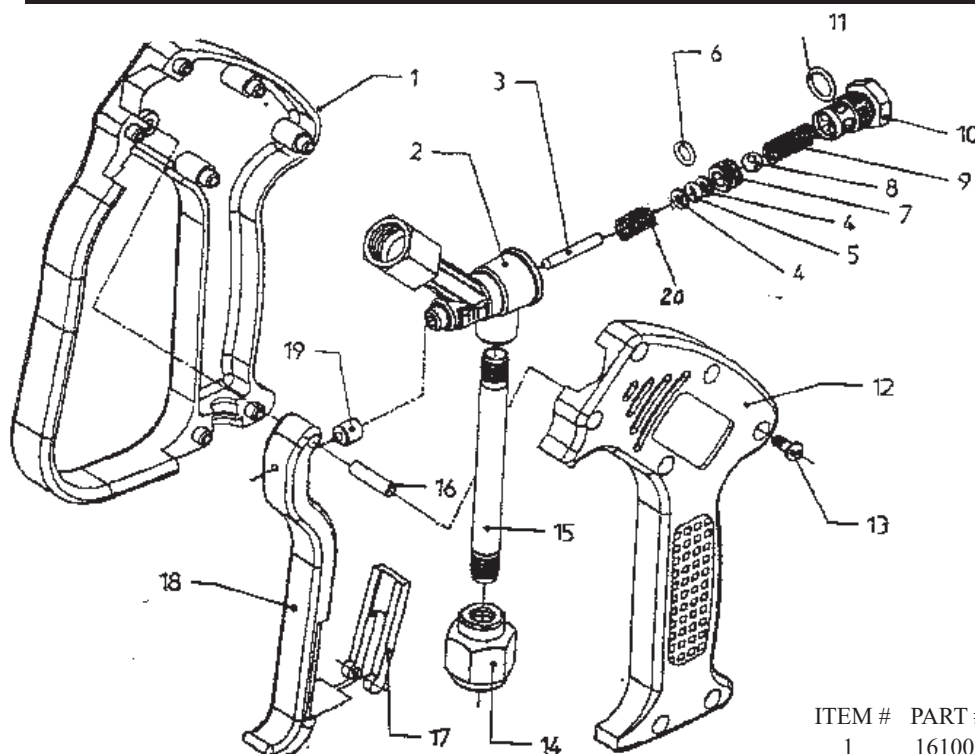

OPERATING CONDITIONS

Maximum Flow: 6.5 GPM
Maximum Pressure: 3000 P.S.I.
Maximum Temperature: 300 °F
Inlet Port: 3/8" FBSP
Outlet Port: 1/4" FBSP



WARNING: This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.
 For more information go to www.P65Warnings.ca.gov

ITEM #	PART #	DESCRIPTION	QUANTITY
1	16100	Plastic Housing	1
2	16101	Valve Body	1
3	16102	S.S. Pin	1
4	16103	Washer	2
5	16104	O-ring	1
6	16105	O-ring	1
7	16106	Seat (27520 Non-Weep)	1
7	16248	Seat (27525 Weep)	1
8	16107	S.S. Ball	1
9	16108	S.S. Spring	1
10	16109	Cap	1
11	16110	O-ring	1
12	16111	Plastic Housing	1
13	16112	Screw	7
14	16113	Inlet Fitting	1
15	16114	Inlet Tube	1
16	16115	Trigger Pin	1
17	16116	Trigger Lock	1
18	16117	Trigger	1
19	16118	Striker	1
20	16119	Spring	1

Repair Kit 9210 (27520)

includes items # 3, 4, 5, 6, 7 (27520), 8, 9, 10, 11, 19 & 20

Repair Kit 9213 (27525)

includes items # 3, 4, 5, 6, 7 (27525), 8, 9, 10, 11, 19 & 20



Giant Industries, Inc.
 900 N. Westwood Ave., P.O. Box 3187, Toledo, Ohio 43607
 419-531-4600 Fax: 419-531-6836

© Copyright 1995 Giant Industries, Inc.

11/95 27520.INDD