


Model 22995A

Unloader with Bypass Connection (for P300 Series Pumps)

Parts List

Item	Part#	Description	Quantity
1	8540	Fitting	1
2	8541	Seal Ring	2
3 ⁿ	8542	O-Ring	1
4	8535	Kickback Valve Cone	1
5 [*]	8536	Kickback Valve Spring	1
6	08706	O-Ring	2
7	8537	Outlet Fitting	1
8	8538	Casing	1
9	8548	Seal Ring	2
10	8549	Spring Retainer	1
11	8550	Pressure Spring	1
12	8551	Nut	1
13 [*]	8552	Handwheel	1
14 ⁿ	8553	Support Ring	1
15 ⁿ	7915	O-Ring	2
16	8555	Piston Rod	1
17	8556	Nut	1
18	8557	Fixing Screw	1
19	8558	Guide Plug	1
20 ⁿ	8559	Support Ring	1
21	8560	Hollow Screw	1
22 ⁿ	08691	Piston Body	1
23 ⁿ	8562	O-Ring	1
24 ⁿ	8563	Seat	1
25 ⁿ	8564	O-Ring	1
26	8565	Connection	1
27	8566	O-Ring	1
28	8567	Hollow Screw	1

Repair Kit#	Includes
ⁿ 9169	3, 14, 15, 20, 22, 23, 24, 25.
[*] 9171	3, 6, 14, 15, 20, 23, 25.

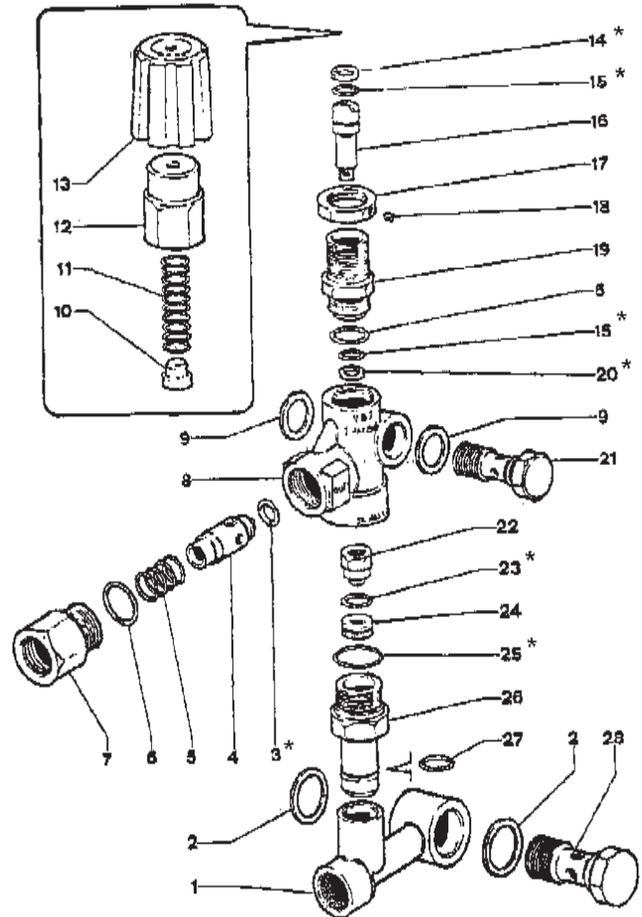

Operating Conditions

Maximum Flow: 8.0 GPM
 Minimum Flow: 1.3 GPM (5.0 l/min)
 Maximum Pressure: 3500 PSI
 Minimum Pressure: 150 PSI (10 bar)
 Maximum Temperature: 194 ° F
 Inlet Port: 1/2 " FNPT
 Outlet Port: 3/8 " FNPT



Giant Industries, Inc.
 900 N. Westwood Ave.
 Toledo, Ohio 43607
 PHONE 419-531-4600
 FAX 419-531-6836, www.giantpumps.com


Note: Always remember to generously lubricate all moving parts with a light weight oil for easy reassembly and to give the moving parts protection when "running in" the unloader.



22995A Unloader with Bypass Connection

Specifications:

Maximum Pressure:	3500 PSI
Minimum Pressure:	150 PSI
Maximum Flow Rate:	8 GPM
Minimum Flow Rate:	1.3 GPM
Maximum Operating Temperature:	194°F
Inlet:	1/2" FNPT
Outlet:	3/8" FNPT

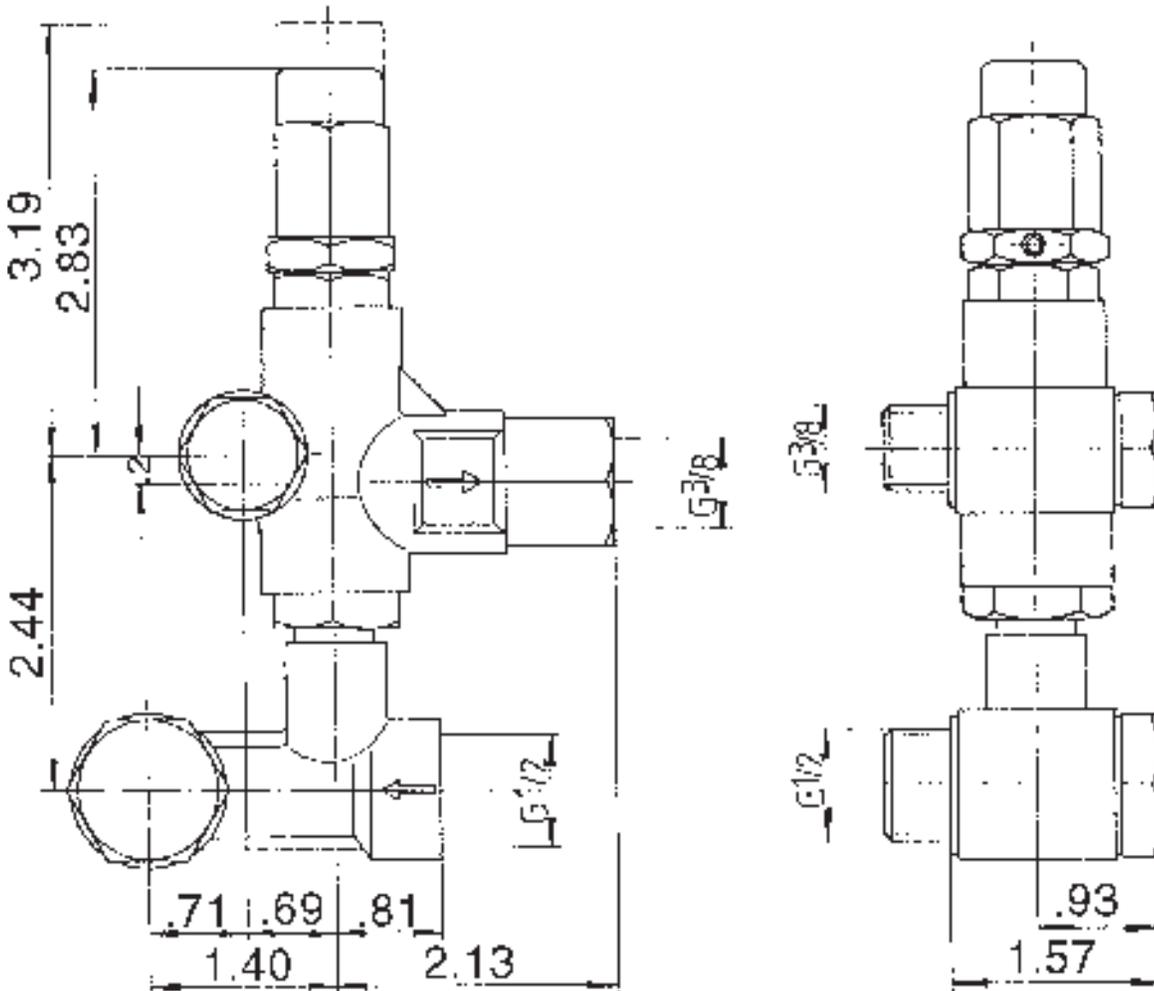

WARNING: This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.
For more information go to www.P65Warnings.ca.gov

Note: Dimensions in inches