


INTRODUCING

P232

**Specially Designed
for Hollow-Shaft
Electric Motors**

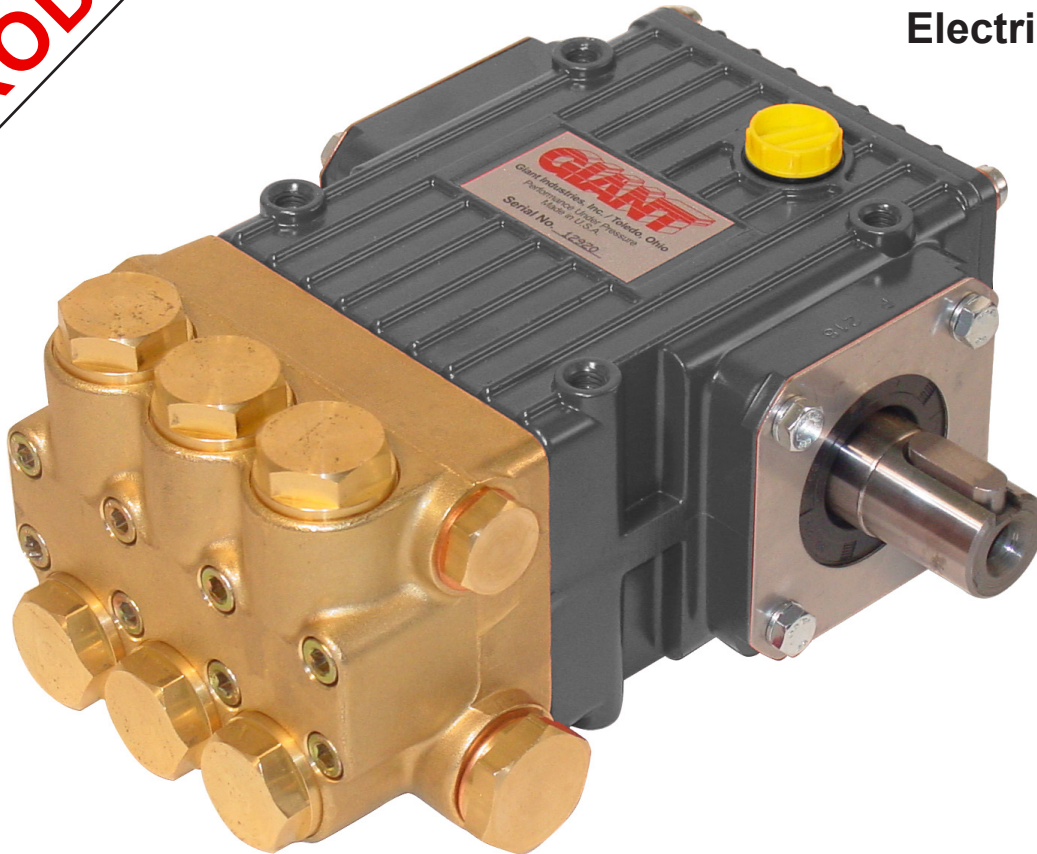

Applications

- Sewer Cleaning
- Pressure Washing
- Misting/Fogging
- Dust Suppression

Specifications

	U.S.	Metric
Volume.....	2.1 GPM.....	8.0 L/min
Pressure	2500 PSI.....	170 bar
Speed		1750RPM
Power	3.62 HP.....	2.7 kW
Temperature	160 °F.....	70 °C
Plunger Size	0.71".....	18 mm
Plunger Stroke.....	0.25".....	6.3 mm
Weight	11.7 lbs.....	5.3 kg

GIANT
Performance Under Pressure

GIANT INDUSTRIES, INC.
900 N. Westwood Ave.
Toledo, Ohio 43607
(419) 531-4600
FAX (419) 531-6836
www.giantpumps.com
© Copyright 2022 Giant Industries, Inc.

Construction

- Crankcase: Aluminum
- Crankshaft: Drop-Forged, hardened ground
- Bearings: Ball Bearings
- Connecting Rods: Special Brass
- Plungers: Solid Ceramic Oxide
- Seals: Nitrile with Fabric Reinforcing
- Valves: High Grade Stainless Steel
- Manifold: Forged Brass

Dimensions - Inches (mm)

