


Series HPUD-3-10

Model HPUDC-3-10

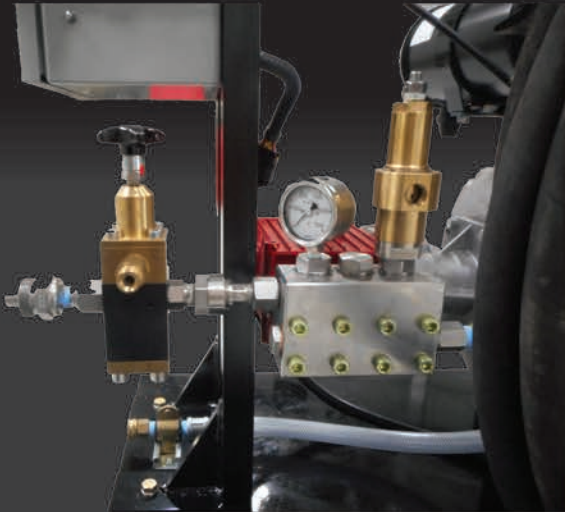

Performance

- 3.0 GPM @ 10,000 PSI
(11.4 L/min @ 690 Bar)
- 28 hp Diesel
- Dimensions: 68"Lx33"Wx57"H

Ruggedly designed pump and diesel unit which features a **compact design** and **continuous duty** Giant pump and over-sized engine. Available with standard design or let us create a **customized** unit to meet your needs.

Applications


- Surface Preparation
- Paint Removal
- Deburring
- Tank Cleaning
- Hydrostatic Testing
- Heat Exchanger Cleaning



Model HPUDC-3-10

Standard Version

- 28 HP Kubota engine, turbo charged with 2.176:1.0 ratio gearbox
- High pressure pump with aluminum crankcase, drop-forged hardened, ground and polished crankshaft, bronze connecting rods, stainless steel manifold and ceramic oxide plungers
- Flow (soft) unloader (rated to 15,000 PSI) which eliminates trapped pressure from discharge line
- Safety Valve (rated for 15,000 PSI) which is adjustable and is capable of working multiple times
- Base frame on casters
- Diesel fuel supply of 7 gallons
- Manual adjustment of engine speed
- Gun/wand/nozzle/hose assembly
- 12 volt battery for electric start
- Inlet "Y" strainer
- All necessary plumbing
- Manual

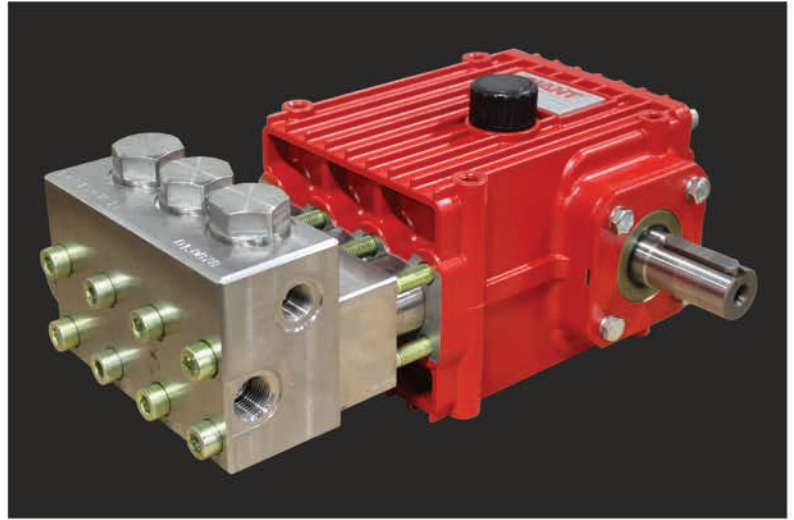

Optional Equipment

- Electronic controls for speed control of engine
- Hydrostatic test unit including bleed-off control
- Automatic water fill valve
- Low water shut-down
- Skid mount versions
- Heavy duty filter with low inlet pressure alarm and connections
- Sound reducing enclosure

