

HPUDS-59 Series

Model HPUDS-5-15

Fits in a Standard Pick Up Truck Bed



Performance

- 4.5 GPM @ 15,000 PSI
(11.4 L/min @ 1000 Bar)
- 59 hp Diesel
- Dimensions: 4' x 5'

Ruggedly designed pump and diesel unit which features a **compact design** and **continuous duty** Giant pump and over-sized engine. Available with standard design or let us create a **customized** unit to meet your needs.

Applications


- Surface Preparation
- Paint Removal
- Deburring
- Tank Cleaning
- Hydrostatic Testing
- Heat Exchanger Cleaning



Model HPUDS-5-15

Standard Version

- 59 HP Kubota engine, turbo charged with over-center clutch
- High pressure pump with spheroidal cast-iron crankcase, drop-forged hardened, ground and polished crankshaft, bronze connecting rods and hardened stainless steel plungers
- Flow (soft) unloader (rated to 17,400 PSI) which eliminates trapped pressure from discharge line
- Safety Valve (rated for 15,000 PSI) which is adjustable and is capable of working multiple times
- Skid designed for standard pick up truck
- Boost Pump
- Diesel fuel supply of 55 gallons
- Manual adjustment of engine speed
- Gun/wand/nozzle/hose assembly
- 12 volt battery for electric start
- Inlet "Y" strainer
- All necessary plumbing
- Manual

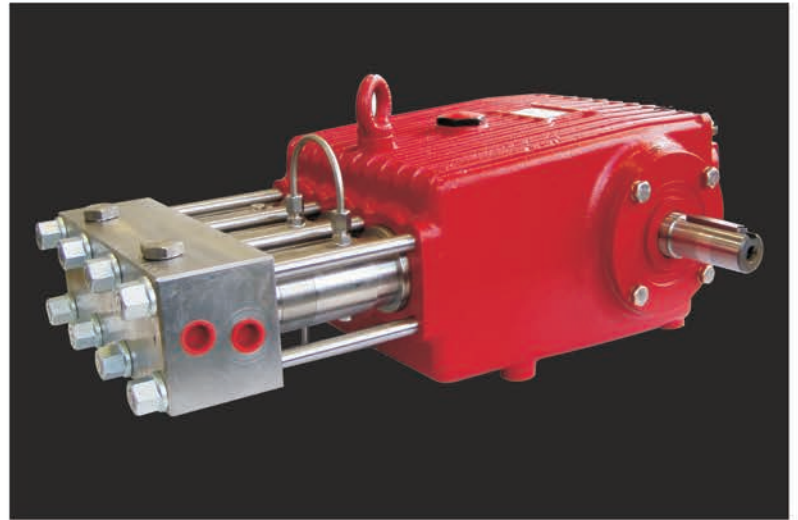

Optional Equipment

- Electronic controls for speed control of engine
- Hydrostatic test unit including bleed-off control
- Automatic water fill valve
- Low water shut-down
- Heavy duty filter with low inlet pressure alarm and connections
- Sound reducing enclosure

