


Model

CGP7255A

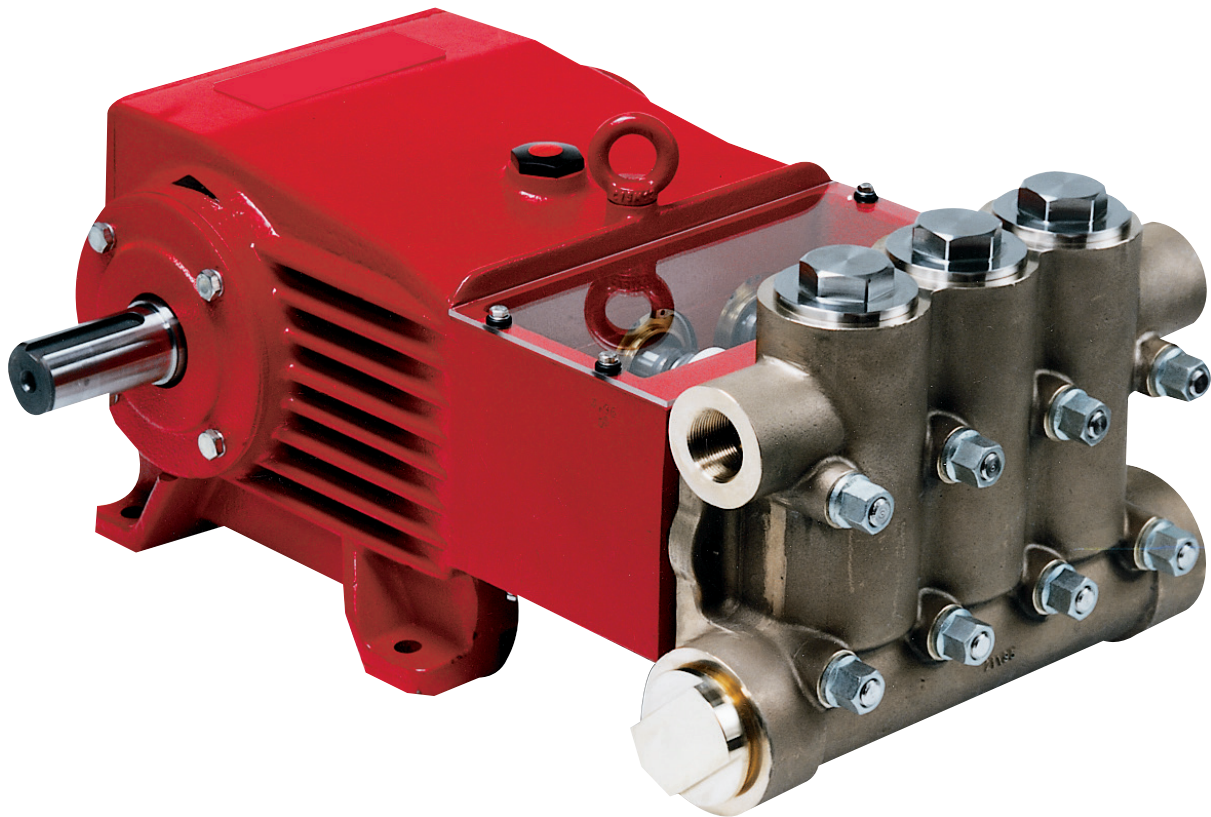

Contents:

Installation Instructions:	page 2
Pump Specifications:	page 3
Exploded View:	page 4
Parts List/Kits	page 5
Repair Instructions:	page 6
Recommended Spare	
Parts List:	page 6
Dimensions:	page 7
Warranty Information	back page

INSTALLATION INSTRUCTIONS

Installation of the ECO₂Blast pump is not a complicated procedure, but there are some basic steps common to all pumps. The following information is to be considered as a general outline for installation. If you have unique requirements, please contact ECO₂Blast or your local distributor for assistance.

1. The pump should be installed flat on a base to a maximum of a 15 degree angle of inclination to ensure optimum lubrication.
2. The inlet to the pump should be sized for the flow rate of the pump with no unnecessary restrictions that can cause cavitation. Teflon tape should be used to seal all joints. If pumps are to be operated at temperatures in excess of 104° F, it is important to insure a positive head to the pump to prevent cavitation.
3. The discharge plumbing from the pump should be properly sized to the flow rate to prevent line pressure loss to the work area. It is essential to provide a safety bypass valve between the pump and the work area to protect the pump from pressure spikes in the event of a blockage or the use of a shut-off gun.
4. Use of a dampener is necessary to minimize pulsation at drive elements, plumbing, connections, and other system areas. The use of a dampener with ECO₂Blast pumps is optional, although recommended by ECO₂Blast to further

reduce system pulsation. Dampeners can also reduce the severity of pressure spikes that occur in systems using a shut-off gun. A dampener must be positioned downstream from the unloader.

5. Crankshaft rotation on ECO₂Blast pumps should be made in the direction designated by the arrows on the pump crankcase. Reverse rotation may be safely achieved by following a few guidelines available upon request from ECO₂Blast. Required horsepower for system operation can be obtained from the chart on page 3.

6. Before beginning operation of your pumping system, remember: Check that the crankcase and seal areas have been properly lubricated per recommended schedules. Do not run the pump dry for extended periods of time. Cavitation will result in severe damage. Always remember to check that all plumbing valves are open and that pumped media can flow freely to the inlet of the pump.

Finally, remember that high pressure operation in a pump system has many advantages. But, if it is used carelessly and without regard to its potential hazard, it can cause serious injury.

IMPORTANT OPERATING CONDITIONS **Failure to comply with any of these conditions invalidates the warranty**

1. Prior to initial operation, add oil to crankcase so that oil level is between the two lines on the oil dipstick. **DO NOT OVERFILL.** Use **ECO₂Blast Recommended Oil**, which is equivalent to SAE 85-90W Industrial Gear Lube Oil. If operating a pump below 32 °F, use synthetic motor oil (SAE 0W40).

Crankcase oil should be changed after the first 50 hours of operation, then at regular intervals of 500 hours or less depending on operating conditions.

2. Pump operation must not exceed rated pressure, volume, or RPM. A pressure relief device must be installed in the discharge of the system.

3. Acids, alkalines, or abrasive fluids cannot be pumped unless approval in writing is obtained before operation from ECO₂Blast.

4. Run the pump dry approximately 10 seconds to drain the water before exposure to freezing temperatures.

Specifications

Model CGP7255A

	U.S.	Metric
Volume.....	51.5 GPM.....	195 LPM
Discharge Pressure	1500 PSI	100 bar
Speed		550 RPM
Inlet Pressure.....	870 PSI	60 bar
Plunger Diameter.....	2.17"	55mm
Plunger Stroke	2.05"	52mm
Crankshaft Diameter.....	1.89"	48mm
Key Width	0.55"	14mm
Crankshaft Mounting.....		Either side
Shaft Rotation		Top of pulley towards manifold
Temperature of Pumped Fluids.....	-40 °F to 140 °F ...	-40 °C to 60 °C
Inlet Ports.....		(2) 2-1/2" BSP
Discharge Ports		(2) 1-1/4" BSP
Weight.....	374 lbs.	170 kg
Crankcase Oil Capacity	1.6 Gal.	6.0 liters
Fluid End Material.....	Nickle-plated Spherodical Cast Iron	

Consult the factory for special requirements that must be met if the pump is to operate beyond one or more of the limits specified above.

PULLEY INFORMATION

Pulley selection and pump speed are based on a 1725 RPM motor and "B" section belts. When selecting desired GPM, allow for a ±5% tolerance on pumps output due to variations in pulleys, belts and motors among manufacturers.

1. Select GPM required, then select appropriate motor and pump pulley from the same line.
2. The desired pressure is achieved by selecting the correct nozzle size that corresponds with the pump GPM.

HORSEPOWER INFORMATION


Horsepower ratings shown are the power requirements for the pump. Gas engine power outputs must be approximately twice the pump power requirements shown above.

We recommend that a 1.15 service factor be specified when selecting an electric motor as the power source. To compute specific pump horsepower requirements, use the following formula:

$$(\text{GPH} \times \text{PSI}) / 1450 = \text{HP}$$

CGP7255A PULLEY SELECTION & HORSEPOWER REQUIREMENTS					
RPM	GPM	800 PSI	1000 PSI	1300 PSI	1500 PSI
250	23.4	13.4	16.7	21.7	25.1
350	32.8	18.7	23.4	30.4	35.1
450	42.1	24.1	30.1	39.1	45.1
550	51.5	29.4	36.8	47.8	55.2

Exploded View - CGP7255A

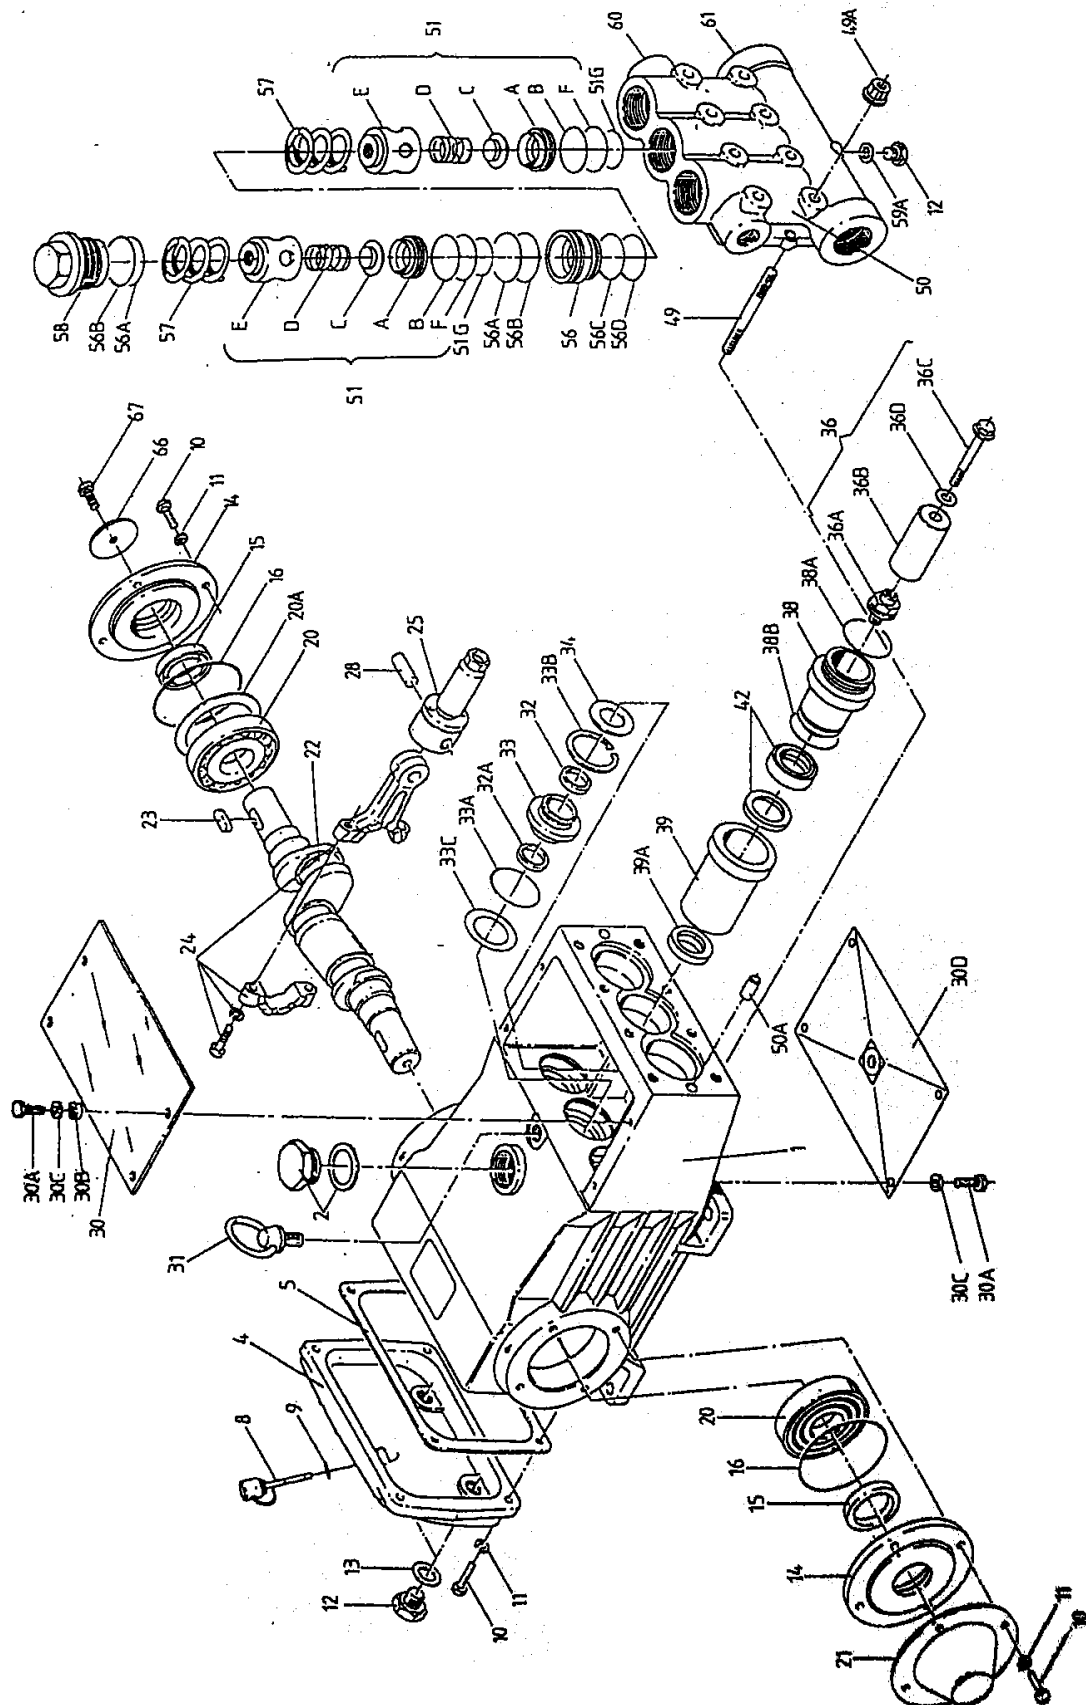

PARTS LIST - CGP7255A

ITEM	PART	DESCRIPTION	QTY.	ITEM	PART	DESCRIPTION	QTY.
1	CP07600	Crankcase	1	36A	CP07667	Plunger Connection	3
2	CP13000	Oil Filler Plug Assembly	1	36B	CP07666	Plunger Pipe (55mm)	3
4	CP07601	Crankcase Cover	1	36C	CP07664	Tension Screw	3
5	CP07602	Gasket, Crankcase Cover	1	36D	CP07665	Copper Ring	3
8	CP07603	Oil Dip Stick	1	38	CP13155	Seal Case	3
9	CP01009	O-Ring, Dip Stick	1	38A	CP13156-0003	O-Ring, EPDM	3
10	CP13133	Hexagon Screw	12	38B	CP07721-0003	O-Ring, EPDM	3
11	CP06725	Spring Washer	12	39	CP13157	Seal Sleeve	3
12	CP07109	Drain Plug	3	39A	CP07723	Compact Ring	3
13	CP07182	Gasket, Drain Plug	2	42	CP07711-0020	V-Sleeve, Teflon	3
14	CP07607	Bearing Cover	2	49	CP13159	Stud Bolt	8
15	CP07608	Radial Shaft Seal	2	49A	CP13160	Hex Nut	8
16	CP07184	O-Ring	2	50	CP06802	Valve Casing	1
20	CP07610	Taper Roller Bearing	2	50A	CP13162	Cylinder Stud	2
20A	CP07611	Fitting Disc (Shim)	1-5	51	CP06994	Valve Assembly	6
21	CP07612	Shaft Protector	1	51A	CP13163	Valve Seat	6
22	CP13405	Crankshaft	1	51B	CP07653-0003	O-Ring, EPDM	6
23	CP07614	Key	1	51C	CP13164	Valve Plate	6
24	CP13182	Connecting Rod Assy.	3	51D	CP07732-0100	Valve Spring, 316 S.S.	6
25	CP13183	Crosshead Assy.	3	51E	CP13165	Spacer Pipe	6
28	CP13184	Crosshead Pin	3	51F	CP13166	Support Ring	6
30	CP07600	Cover Plate	1	51G	CP07266-0003	O-Ring, EPDM	6
30A	CP07225-0100	Hexagon Screw	8	56	CP13167	Valve Adaptor	3
30B	CP13136	Grommet	4	56A	CP07658-0003	O-Ring, EPDM	6
30C	CP07622	Washer	8	56B	CP07635	Support Ring	6
30D	CP13154	Cover Plate	1	56C	CP13168	Support Ring	3
31	CP07623	Eye Bolt	1	56D	CP07653-0003	O-Ring, EPDM	3
32	CP07624	Radial Shaft Seal	3	57	CP13173	Tension Spring	6
32A	CP07625	Shaft Seal	3	58	CP13170	Plug, M64 x 2	3
33	CP07626	Seal Retainer	3	59A	CP07661	Copper Ring	1
33A	CP07627	O-Ring	3	60	CP13151	Plug, 1-1/4" BSP	1
33B	CP07628	Circlip	3	61	CP13171	Plug, 2-1/2" BSP	1
33C	CP07249	Fitting Disc	3	66	CP13362	Disc For Crankshaft	1
34	CP13137	Oil Scraper	3	67	CP13358	Hexagon Screw	1
36	CP07706	Plunger Pipe Assy., (36 A-D)	3				

REPAIR KITS - CGP7255A

Plunger Packing Kit

CP09593

Item	Part #	Description	Qty.
38A	CP13156-0003	O-Ring, EPDM	3
38B	CP07721-0003	O-Ring, EPDM	3
39A	CP07723	Compact Ring	3
42	CP07711-0020	V-Sleeve, Teflon	6

Oil Seal Kit

CP09221

Item	Part #	Description	Qty.
32	CP07624	Radial Shaft Seal	3
32A	CP07625	Shaft Seal	3
33A	CP07627	O-Ring, Oil Seal Housing	3

Valve Assembly Kit

CP09594

Item	Part #	Description	Qty.
51A	CP13163	Valve Seat	2
51B	CP07653-0003	O-Ring, EPDM	2
51C	CP13164	Valve Plate	2
51D	CP07732-0100	Valve Spring, 316 S.S.	2
51F	CP13166	Support Ring	2
51G	CP07266-0003	O-Ring, EPDM	2
56A	CP07658-0003	O-Ring, EPDM	2
56B	CP07635	Support Ring	2
56C	CP13168	Support Ring	1
56D	CP07653-0003	O-Ring, EPDM	2

CGP7255A REPAIR INSTRUCTIONS

TO CHECK VALVES

Loosen plugs (58), take out tension spring (57) and then remove the complete valve (51) with either a valve tool or an M16 hexagon screw. Remove valve adapter (56) and tension spring (57) with pull-out tool size 5. There is an O-ring (51G) under both the suction and the discharge valve each of which can be removed with a bent piece of wire. To disassemble valve hit the top of the valve plate (C) carefully with a bolt and press the valve seat (A) out of the spacer pipe (E). Check sealing surfaces and replace worn parts. Check O-rings and support rings. Tighten plugs (58) to 107 ft. lbs.

TO CHECK SEALS AND PLUNGER PIPE

Loosen nuts (49A) and remove pump head. Separate plunger connection (36A) from crosshead (25) by means of two open-end wrenches (size 22 and 27). Pull seal sleeves (39) out of their fittings in the crankcase. Take seal case (38) out of seal sleeve (39). Examine plunger parts (36A-36D), seals (42, 39A) and O-rings. When replacing plunger pipe (36B), tighten tension screws (36C) to 30 ft. lbs. Replace worn parts; grease seals with Silicone before installing.

CAUTION: Don't loosen the 3 plunger connections (36A) before the valve casing has been removed otherwise the tension screw (36C) could hit against the spacer pipe (51E) when the pump is being turned. Seal life can be increased if the pretensioning allows for a little leakage. This assists lubrication and keeps the seals cool. It is therefore not necessary to replace seals before the leakage becomes too heavy and causes output and operating pressure to drop.

MOUNTING VALVE CASING

Check O-rings on seal case (38). Clean surfaces of seal sleeves in gear box and sealing surfaces of valve casing. Push valve casing carefully on O-rings of seal case and centering studs (50A). Tighten nuts (49A) to 103 ft. lbs.

TO DISASSEMBLE GEAR

Take out plunger and seal sleeves as described above. Drain oil. After removing the circlip ring (33B), lever out seal retainer (33) with a screw driver. Check seals (32, 32A, 33A) and surfaces of crosshead. Remove crankcase cover (4). Loosen inner hexagon screws on the connecting rods (24) and push con rod halves as far into the crosshead guide as possible.

Note: Connecting rods are marked for identification. Do not twist con rod halves. Con rod is to be reinstalled in the same position on shaft journals. Check surfaces of connecting rod and crankshaft (22) take out bearing cover to one side and push out crankshaft taking particular care that the conrod doesn't get bent.



Note: Seal (32A) must always be installed so that the seat up on the inside diameter faces the oil.

Reassemble in reverse order: Regulate axial bearing clearance minimum 0.1mm, maximum 0.15 by means of fitting disc (20A) shaft should turn easily with little clearance. Tighten inner hexagon screws to 30 ft. lbs.

Note: Connecting rod has to be able to be slightly moved sideways at the stroke journals.

Preventative Maintenance Check-List & Recommended Spare Parts List						
Check	Daily	Weekly	50hrs	Every 500 hrs	Every 1500 hrs	Every 3000 hrs
Oil Level/Quality	X					
Oil Leaks	X					
Water Leaks	X					
Belts, Pulley		X				
Plumbing		X				
Recommended Spare Parts						
Oil Change (1 Quart) p/n 1153			X	X		
Seal Spare Parts (1 kit/pump) (See page 5 for kit list)					X	
Oil Seal Kit (1 kit/pump) (See page 5 for kit list)					X	
Valve Spare Parts (1 kit/pump) (See page 5 for kit list)						X

CGP7255A SERIES DIMENSIONS - INCHES (mm)

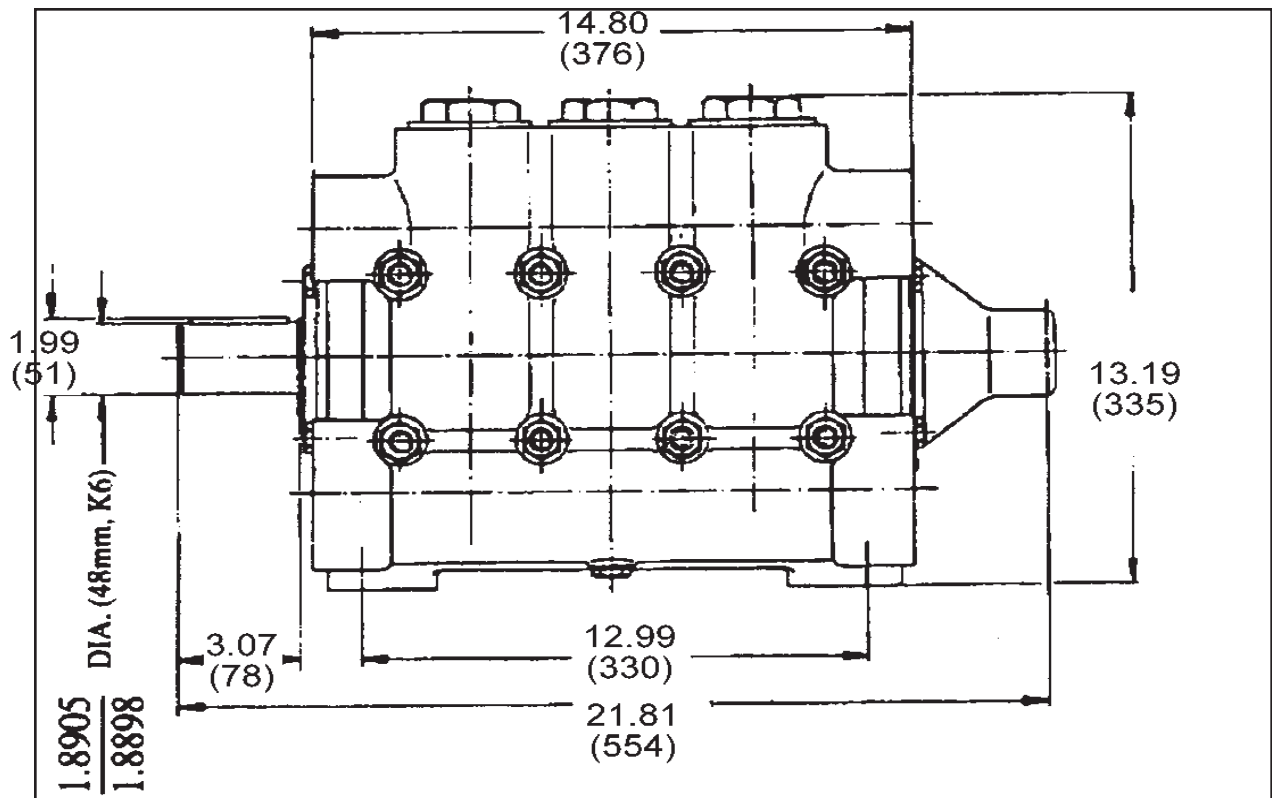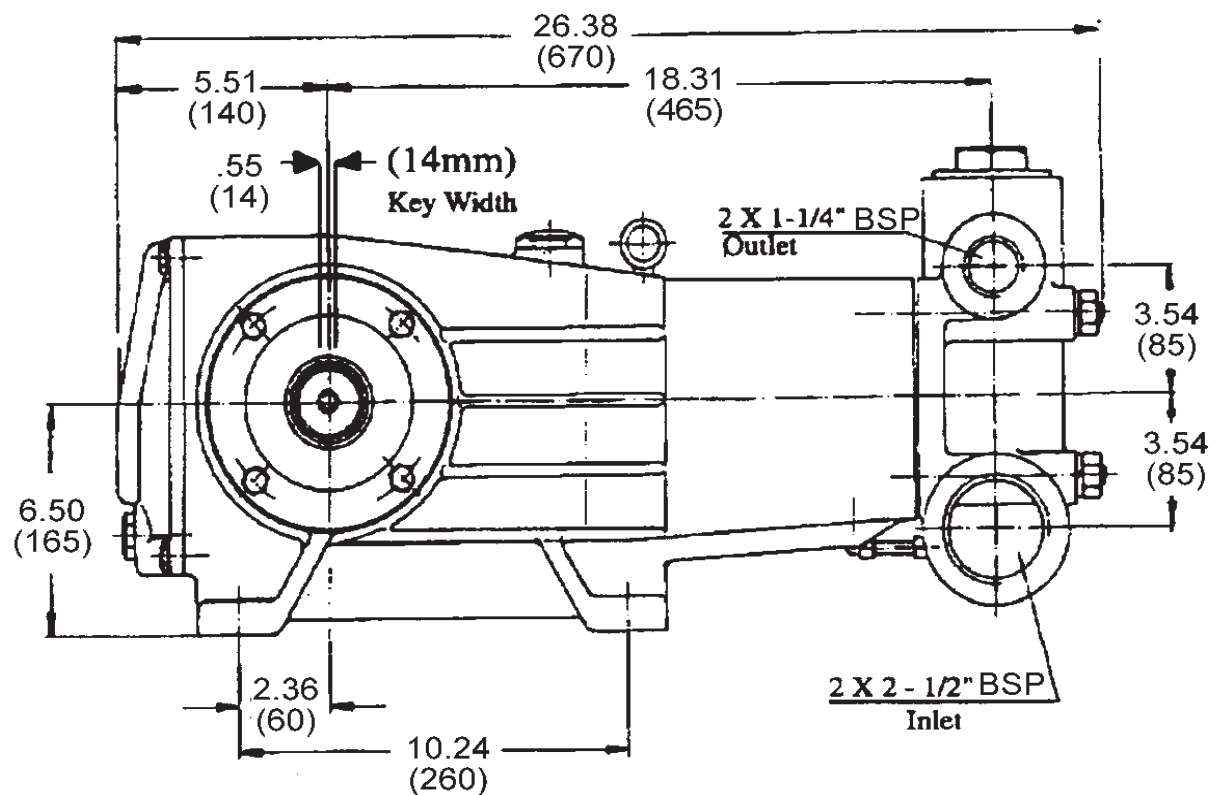

LIMITED WARRANTY

Eco₂Blast pumps and accessories are warranted by the manufacturer to be free from defects in workmanship and material as follows:

1. For portable pressure washers and car wash applications, the discharge manifolds will never fail, period. If they ever fail, we will replace them free of charge. Our other pump parts, used in portable pressure washers and in car wash applications, are warranted for five years from the date of shipment for all pumps used in NON-SALINE, clean water applications.
2. One (1) year from the date of shipment for all other Eco₂Blast industrial and consumer pumps.
3. Six (6) months from the date of shipment for all rebuilt pumps.
4. Ninety (90) days from the date of shipment for all Eco₂Blast accessories.

This warranty is limited to repair or replacement of pumps and accessories of which the manufacturer's evaluation shows were defective at the time of shipment by the manufacturer. The following items are NOT covered or will void the warranty:

1. Defects caused by negligence or fault of the buyer or third party.
2. Normal wear and tear to standard wear parts.
3. Use of repair parts other than those manufactured or authorized by Eco₂Blast.
4. Improper use of the product as a component part.
5. Changes or modifications made by the customer or third party.
6. The operation of pumps and or accessories exceeding the specifications set forth in the Operations Manuals provided by Eco₂Blast.

Liability under this warranty is on all non-wear parts and limited to the replacement or repair of those products returned freight prepaid to Eco₂Blast which are deemed to be defective due to workmanship or failure of material. A Returned Goods Authorization (R.G.A.) number and completed warranty evaluation form is required prior to the return to Eco₂Blast of all products under warranty consideration. Call (260)728-4433 to obtain an R.G.A. number.

Repair or replacement of defective products as provided is the sole and exclusive remedy provided hereunder and the MANUFACTURER SHALL NOT BE LIABLE FOR FURTHER LOSS, DAMAGES, OR EXPENSES, INCLUDING INCIDENTAL AND CONSEQUENTIAL DAMAGES DIRECTLY OR INDIRECTLY ARISING FROM THE SALE OR USE OF THIS PRODUCT.

THE LIMITED WARRANTY SET FORTH HEREIN IS IN LIEU OF ALL OTHER WARRANTIES OR REPRESENTATION, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND ALL SUCH WARRANTIES ARE HEREBY DISCLAIMED AND EXCLUDED BY THE MANUFACTURER.



WARNING: This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.
For more information go to www.P65Warnings.ca.gov



SOLD EXCLUSIVELY THROUGH AQUA BLAST

1025 W. Commerce Drive, Decatur, IN 46733
PHONE (260) 728-4433, FAX (260) 728-4517, www.aquablast.com
© Copyright 2017 Eco₂Blast