


INTRODUCING

BPK7180

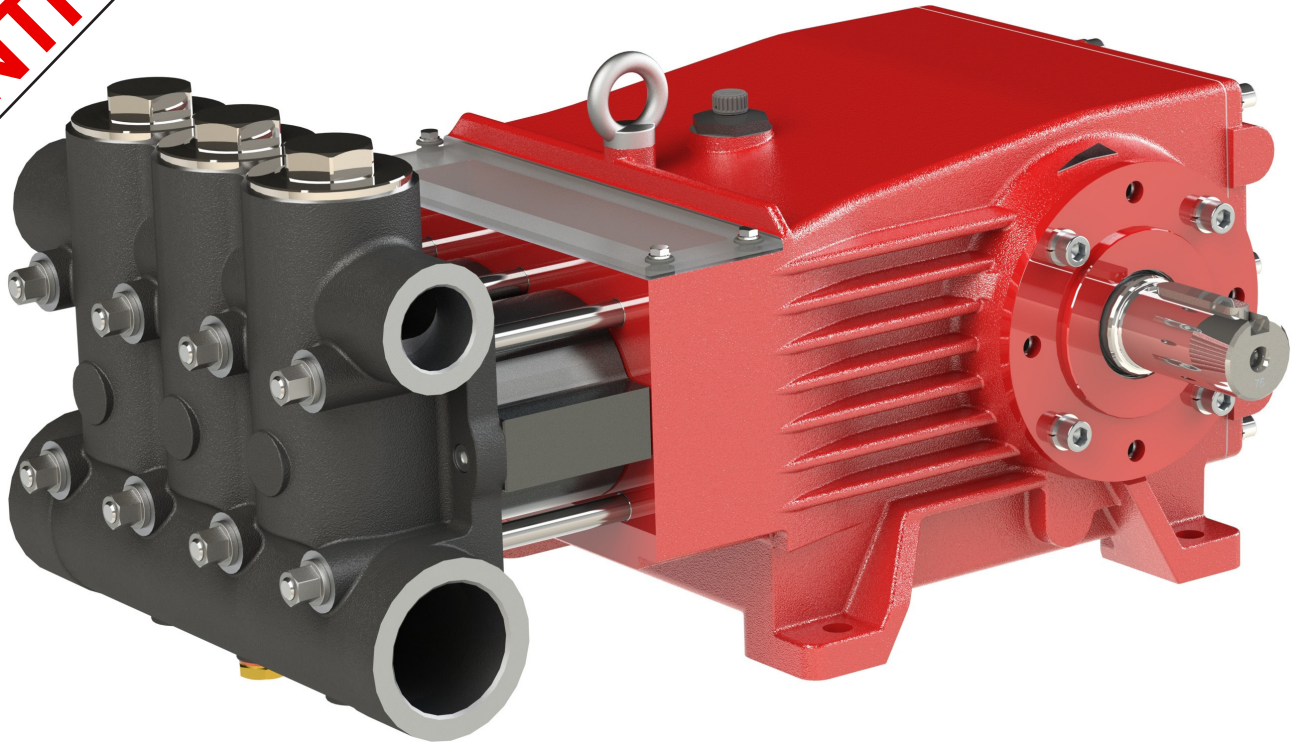

Applications

- Bentonite
- Tunneling
- Boring
- Horizontal Directional Drilling
- Mining
- Chemical Injection

Specifications

	U.S.	Metric
Volume.....	106 GPM.....	400 L/min
Pressure.....	1000 PSI.....	70 Bar
Speed.....		540 RPM
Power.....	74 BHP.....	55.2 kW
Plunger Size.....	3.15".....	80mm
Plunger Stroke.....	2.05".....	52mm
Weight.....	379 lbs.....	172 kg

GIANT

Performance Under Pressure

GIANT INDUSTRIES, INC.

900 N. Westwood Ave.

Toledo, Ohio 43607

(419) 531-4600

FAX (419) 531-6836

www.giantpumps.com

© Copyright 2013 Giant Industries, Inc.

Construction

- Crankcase: Solid Spheroidal Cast Iron to ensure stability and vibration dampening
- Crankshaft: Drop forged, hardened, ground and polished
- Bearings: Tapered Roller
- Connecting Rods: Bronze
- Cylinder Liner: Solid Ceramic
- Seals: Polyurethane
- O-Rings: Nitrile
- Valves: High Grade Stainless Steel / Delrin

Dimensions - Inches (mm)

