


INTRODUCING

GP5145LS

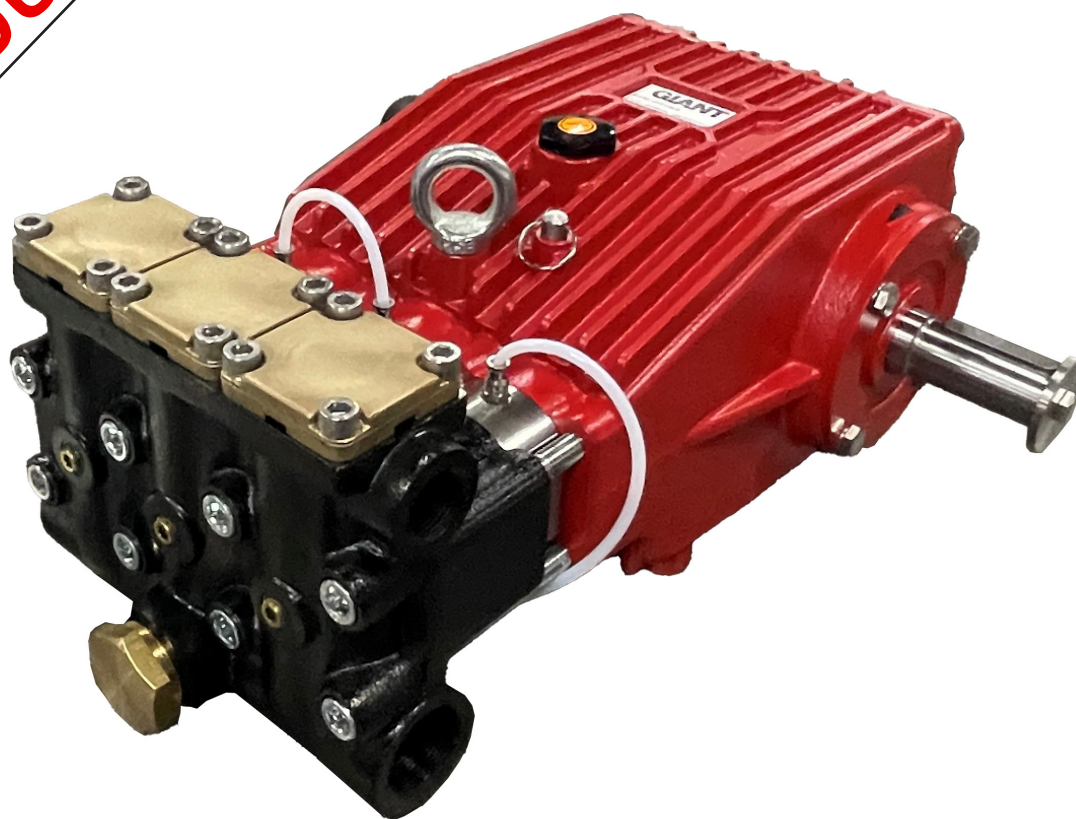

Applications

- Car Wash
- Truck Wash
- Industrial Cleaning
- Misting/Fogging
- Central Cleaning Stations

Specifications

	U.S.	Metric
Volume.....	45 GPM.....	170 L/min
Pressure	1500 PSI.....	100 bar
Speed		800 RPM
Power	46.6 HP.....	34.7 kW
Temperature	140 °F.....	60 °C
Plunger Size	1.8".....	45 mm
Plunger Stroke.....	1.9".....	48 mm
Weight	179 lbs.....	81 kg

GIANT
Performance Under Pressure

GIANT INDUSTRIES, INC.
900 N. Westwood Ave.
Toledo, Ohio 43607
(419) 531-4600
FAX (419) 531-6836
www.giantpumps.com
© Copyright 2025 Giant Industries, Inc.

Construction

- Crankcase: Spheroidal Cast Iron
- Crankshaft: Drop forged, hardened, ground and polished
- Bearings: Tapered Roller
- Connecting Rods: Bronze
- Plungers: Hard Metal Coating
- Seals: Nitrile with fabric reinforcing with weep return system
- Valves: High Grade Stainless Steel
- Manifold: Cast Iron with KTL Coating

Dimensions - Inches (mm)

