


# Models 22192-22195

## Pressure Switch

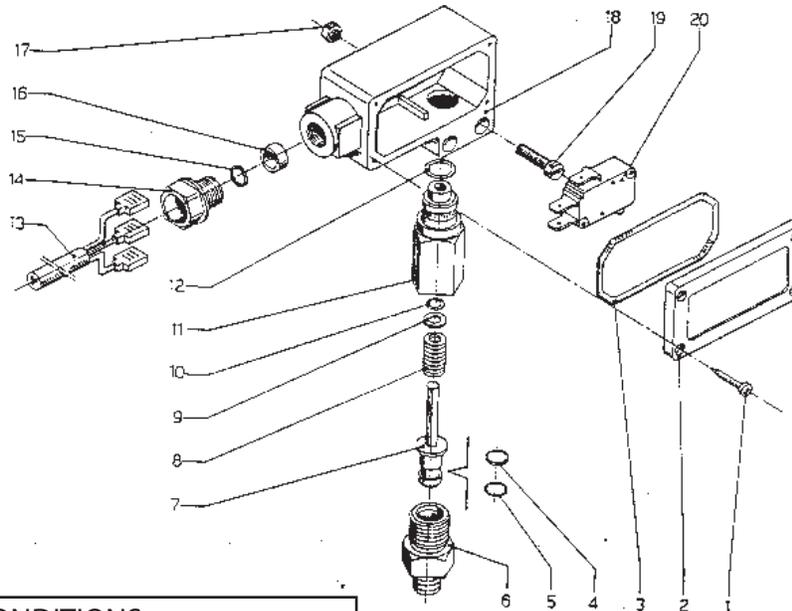

### OPERATING CONDITIONS

**Maximum Pressure:** 3625 P.S.I.  
**Maximum Temperature:** 194 °F  
**Inlet Port:** 1/4" MBSP (22192 & 22193)  
**Inlet Port:** 3/8" MBSP (22194 & 22195)  
**Actuation Pressure:** 350 P.S.I.  
 (22192 & 22194)  
**Actuation Pressure:** 600 P.S.I.  
 (22193 & 22195)

### WIRING CONDITIONS

**Maximum Voltage:** 250V  
**Maximum Amperage:** 15A  
**Blue - Common**  
**Brown - Normally Open**  
**Red - Normally Closed**

| ITEM # | PART # | DESCRIPTION                     | QUANTITY |
|--------|--------|---------------------------------|----------|
| 1      | 16125  | Self Tapping Screw              | 4        |
| 2      | 16157  | Plastic Cover                   | 1        |
| 3      | 16158  | O-ring                          | 1        |
| 4      | 16122  | Back-up Ring                    | 1        |
| 5      | 16160  | O-ring                          | 1        |
| 6      | 16161  | 1/4" Body (22192 & 22193)       | 1        |
| 6a     | 16162  | 3/8" Body (22194 & 22195)       | 1        |
| 7      | 16163  | Piston                          | 1        |
| 8      | 16164  | Spring (22192 & 22194)          | 1        |
| 8a     | 16165  | Spring (22193 & 22195)          | 1        |
| 9      | 16166  | Washer                          | 1        |
| 10     | 16167  | O-ring                          | 1        |
| 11     | 16168  | Valve Body                      | 1        |
| 12     | 16169  | O-ring                          | 1        |
| 13     | 16170  | Cable                           | 1        |
| 14     | 16171  | Nipple                          | 1        |
| 15     | 16172  | Washer                          | 1        |
| 16     | 16173  | Spacing Washer                  | 1        |
| 17     | 16174  | Nut                             | 2        |
| 18     | 16175  | Plastic Housing (22192 & 22194) | 1        |
| 18a    | 16176  | Plastic Housing (2293 & 22195)  | 1        |
| 19     | 16177  | Screw                           | 2        |
| 20     | 16178  | Micro-Switch                    | 1        |

### Repair Kit 9215 (Model # 22192 & 22193)

includes items # 4, 5, 7, 8, 9, 10 & 12

### Repair Kit 9216 (Model # 22194 & 22195)

includes items # 4, 5, 7, 8a, 9, 10 & 12



Giant Industries, Inc.

900 N. Westwood Ave., P.O. Box 3187, Toledo, Ohio 43607

419-531-4600 Fax: 419-531-6836



**WARNING:** This product might contain a chemical known to the State of California to cause cancer, and birth defects or other reproductive harm.

For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)